RECO

ARCHITECTURAL LIGHTING

INTERIOR 2026 - 2027

Reco Lighting (Shanghai) Manufacturing Co.,Ltd.

Add: Building 1 No.81 Guanghua Road,Xiaokunshan Town, Songjiang District, Shanghai.
TEL: +86 21 3352 1233
FAX: +86 21 3352 1486
E-mail: william@recolighting.com

Reco (Asia) Limited

Add: 2/F., Yau Tak Building, 167 Lockhart Road, Wanchai, Hong Kong
TEL: +852 3576 3891
FAX: +852 3576 3231
E-mail: phoenix@recolighting.com

Dongguan Guangrui Intelligent Technology Co., Ltd

Add: No. 2, Baoshou Road, Yongkou, Shijie Town, Dongguan City, Guangdong Province China.
Post code: 523299

www.recolighting.com

INTERIOR 2026 - 2027

RECO

ARCHITECTURAL LIGHTING

INTERIOR
2026 - 2027

Welcome to

RECO

FOR TECHNICAL PROFESSIONAL CHANNEL

RECO

We are a lighting solution provider
in both interior & exterior
architecture and building,
with advanced & leading technology
and aesthetic design.

R e n o v a t i o n

E f f i c i e n c y

C o m f o r t

O p t i m u m

Architecture - Landscape - Commercial - Office - Residential - Leisure - Retail

Hotel Recessed Downlight Collection

FOCUS LED


P 3

P 4

P 6

P 7




P 9

ZONE LED


P 11

P 12

P 13

P 14

P 15

P 16

P 17

P 18

DOT


P 19

P 20

P 22

P 23

Hotel Recessed Downlight Collection

ALEX LED


P 25

P 26

P 27

P 28

DORIS LED


P 30

P 31

P 32

P 33

P 35

P 36

P 39

P 40

LITO LED


P 42

P 43

P 44

P 45

ALITO LED


P 46

P 48

P 49

P 50

Professional Recessed Downlight Collection

LUX


P 51

P 53

P 54

P 55

P 57

P 58

ALUX

P 59

P 60

P 61

P 62

P 65

P 66

ROX

P 67

P 68

P 69

AROX

P 70

P 71

P 72

CORE PRO

P 75

P 76

P 78

P 79

P 80

P 83

P 84

P 85

P 88

BRIM II

P 94

P 95

P 97

P 99

P 100

P 101

Wallwasher Recessed Downlight Collection

SIDE

P 90

P 91

P 92

LED Linear Recessed Downlight

LINO

P 103

P 104

P 105

P 106

P 107

LINO II

P 108

P 109

P 110

P 111

LED Trimless Linear Recessed Downlight

ALINO

P 112

P 113

P 114

P 115

P 116

LED Surface Linear Light

SLINE

P 117

P 118

P 119

P 120

P 121

P 122

Slim Trim Round Recessed Downlight

VISION LED


P 124

P 125

P 126

P 128

Slim Trim Square Recessed Downlight

VISION LED


P 129

P 130

P 132

P 133

P 135

P 136

P 137

P 138

P 139

P 140

P 142

P 143

P 144

P 145

P 146

P 147

P 148

LED Square Recessed Downlight

FRAME


P 150

P 152

P 154

P 155

P 156

P 158

LED Trimless Square Recessed Downlight

FLUSH


P 160

P 161

P 162

P 163

P 165

P 166

P 167

P 168

P 169

P 170

P 171

P 172

P 173

P 174

LED Surface Downlight

NIPPLE

P 176

P 177

P 179

P 180

P 181

P 182

P 183

P 184

Interior 2026 - 2027

LED Recessed Spot Light

TINI

P 189

P 191

LED Surface Spot Light

TINI

P 193

P 194

LED Track Light

TINI

P 195

P 197

P 199

P 200

Office Lighting

PROFILE LED

P 203

P 204

P 205

P 206

P 207

P 208

P 209

P 210

P 211

P 212

P 213

P 214

P 215

P 216

MOON

P 217

P 218

P 219

P 220

P 221

Gypsum Downlight

ARTIE LED

P 223

P 224

P 225

P 226

Gypsum Wall Luminaire

ARTIE LED

P 227

P 228

Wall Recessed Step Light

CURVE LED

P 229

P 230

P 231


choose your right


Interior

light from here

choose your right light from here

FOCUS LED *Hotel Recessed Downlight Collection*
ZONE LED *Hotel Recessed Downlight Collection*
DOT *Hotel Recessed Downlight Collection*
ALEX LED *Hotel Recessed Downlight Collection*
DORIS LED *Hotel Recessed Downlight Collection*
LITO LED *Hotel Recessed Downlight Collection*
ALITO LED *Hotel Recessed Downlight Collection*
LUX *Professional Recessed Downlight Collection*
ALUX *Professional Recessed Downlight Collection*
ROX *Professional Recessed Downlight Collection*
AROX *Professional Recessed Downlight Collection*
CORE PRO *Professional Recessed Downlight Collection*
BRIM II *Professional Recessed Downlight Collection*
SIDE *Wallwasher Recessed Downlight Collection*
LINO *LED Linear Recessed Downlight*
LINO II *LED Linear Recessed Downlight*
ALINO *LED Trimless Linear Recessed Downlight*
SLINE *LED Surface Linear Light*
VISION LED *Slim Trim Round Recessed Downlight*
VISION LED *Slim Trim Square Recessed Downlight*
FRAME *LED Square Recessed Downlight*
FLUSH *LED Trimless Square Recessed Downlight*
NIPPLE *LED Surface Downlight*
TINI *LED Recessed Spot Light*
TINI *LED Surface Spot Light*
TINI *LED Track Light*
PROFILE LED *Office Lighting*
MOON *Office Lighting*
ARTIE LED *Gypsum Downlight*
ARTIE LED *Gypsum Wall Luminaire*
CURVE LED *Wall Recessed Step Light*

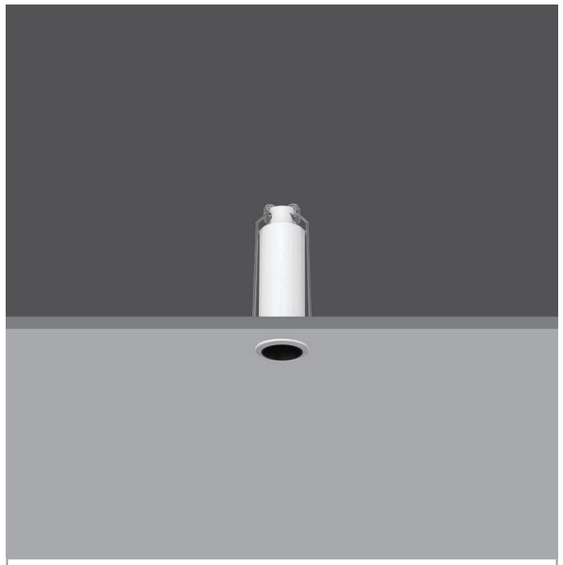



IP20 3 SDCM Dimmable

40,000hrs（Ta=25° C）
SMD LED

81002011 1W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 23 lm

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

24 - 24D

24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81002011 - 1 - 80 - 27 - 00 - WH - D0
For complete code ordering information, please see page 232.

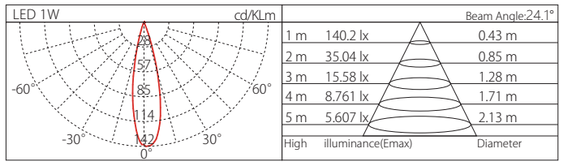

* IES files of different beam angle are available upon request.





IP20 3 SDCM Dimmable

40,000hrs（Ta=25° C）
SMD LED

81002012 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 49 lm

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

24 - 24D

24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81002012 - 3 - 80 - 27 - 00 - WH - D0
For complete code ordering information, please see page 232.

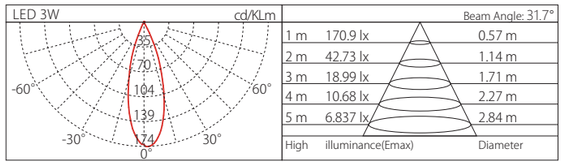



* IES files of different beam angle are available upon request.



WuHan Galaxy Shopping Mall

FOCUS LED Hotel Recessed Downlight Collection

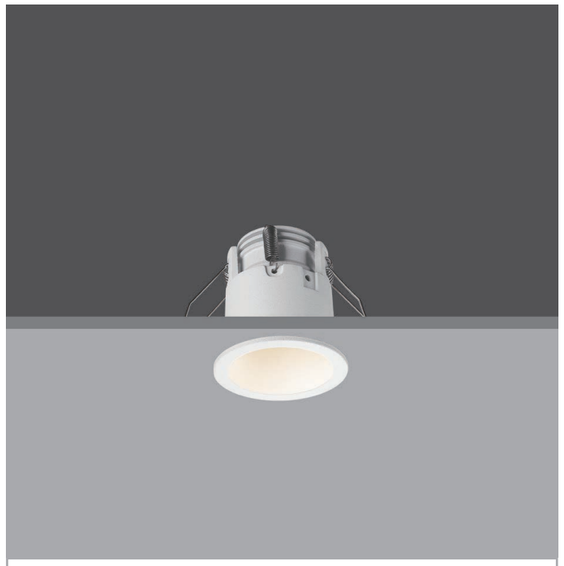




IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Easy for installation and maintenance.

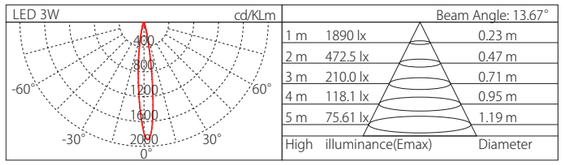

* IES files of different beam angle are available upon request.

81012670 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 165 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
30 - 30D

15° 30°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012670 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

FOCUS LED Hotel Recessed Downlight Collection






IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Rotate 355° and tilt ±20 °.
Easy for installation and maintenance.



		Beam Angle: 13.40°
1 m	1461 lx	0.24 m
2 m	365.3 lx	0.47 m
3 m	162.3 lx	0.70 m
4 m	91.32 lx	0.94 m
5 m	58.44 lx	1.17 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81012817 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 120 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
30 - 30D

15° 30°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81012817 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.



* Lumen output is concerned with different CCT.

FOCUS LED Hotel Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81012780 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 420 lm

FOCUS LED downlight is with super slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Rotate 355° and tilt ±20 °.
Easy for installation and maintenance.

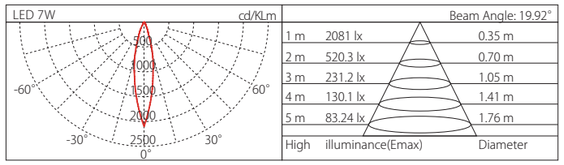

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

20 - 20D
40 - 40D

20° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012780 - 7 - 90 - 27 - 20 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.


Grand Hyatt Hotel Chuansha





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81012680 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 130 lm

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012680 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

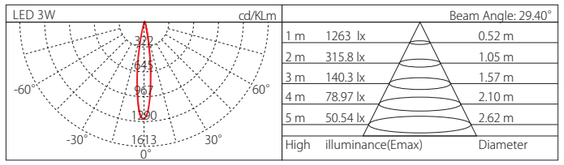

* IES files of different beam angle are available upon request.





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81012827 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 130 lm

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012827 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

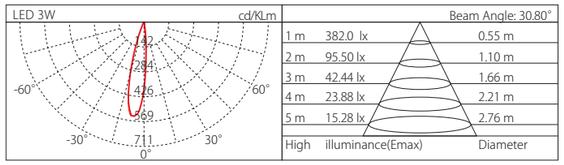

* IES files of different beam angle are available upon request.





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81012797 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 130 lm

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81012797 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

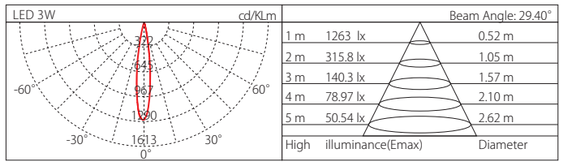

Beam Angle: 29.40°		
1 m	1263 lx	0.52 m
2 m	315.8 lx	1.05 m
3 m	140.3 lx	1.57 m
4 m	78.97 lx	2.10 m
5 m	50.54 lx	2.62 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81012807 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 130 lm

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81012807 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

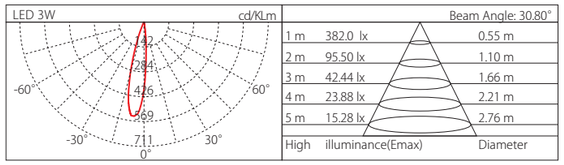

Beam Angle: 30.80°		
1 m	382.0 lx	0.55 m
2 m	95.50 lx	1.10 m
3 m	42.44 lx	1.66 m
4 m	23.88 lx	2.21 m
5 m	15.28 lx	2.76 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81053288 6W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 320 lm

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81053288 - 6 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

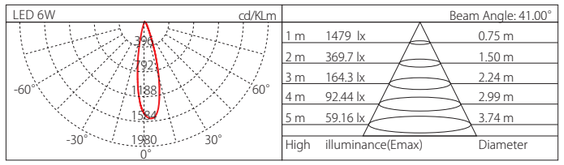

* IES files of different beam angle are available upon request.

ZONE LED Hotel Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032350.2 6W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 320 lm

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81032350.2 - 6 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

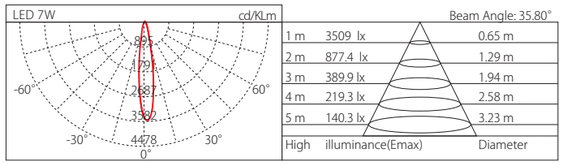

* IES files of different beam angle are available upon request.

81012528 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 470 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012528 - 7 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

ZONE LED downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Adjustable.
Easy for installation and maintenance.

81012538 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 470 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012538 - 7 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

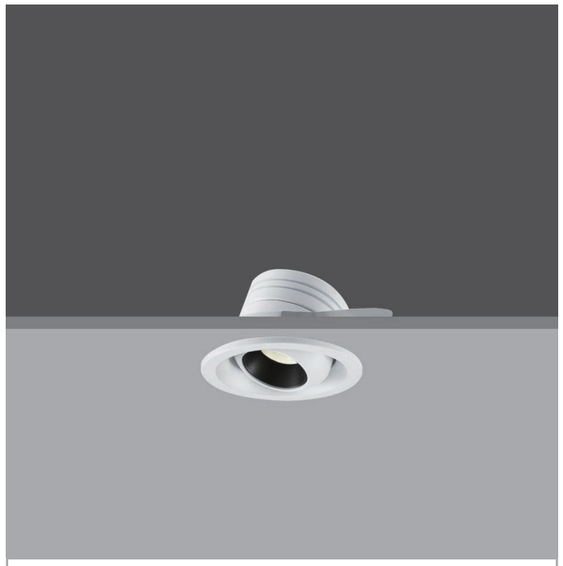



IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

DOT downlight is with super thin and elegant design, easy for installation. Specialized in cabinet application for those area has limit height space. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Adjustable.
Easy for installation and maintenance.

81018278 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 150 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81018278 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

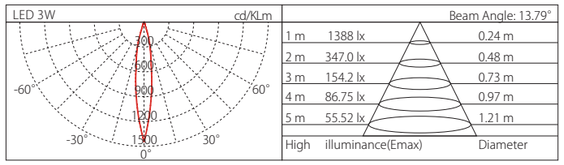

* IES files of different beam angle are available upon request.





IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

DOT downlight is with super thin and elegant design, easy for installation. Specialized in cabinet application for those area has limit height space. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

81052968 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 150 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

24 - 24D
40 - 40D

24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81052968 - 3 - 90 - 27 - 24 - WH - D1
For complete code ordering information, please see page 232.

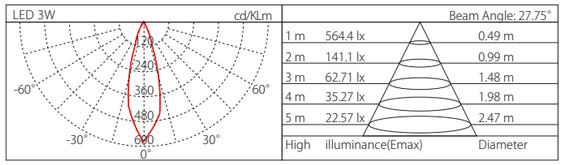


* IES files of different beam angle are available upon request.



DOT Hotel Recessed Downlight Collection






IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

DOT downlight is with super thin and elegant design, easy for installation. Specialized in cabinet application for those area has limit height space. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Pure aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Adjustable.
Easy for installation and maintenance.

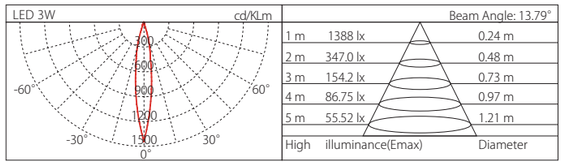

		Beam Angle: 13.79°
1 m	1388 lx	0.24 m
2 m	347.0 lx	0.48 m
3 m	154.2 lx	0.73 m
4 m	86.75 lx	0.97 m
5 m	55.52 lx	1.21 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81052998 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 150 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

24 - 24D
40 - 40D

24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81052998 - 3 - 90 - 27 - 24 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

DOT Hotel Recessed Downlight Collection





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81018268 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens:160 lm

DOT downlight is with super thin and elegant design, easy for installation. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing and plastic cover.
Powdercoated finish in White or Black.
High transparent lens, minimized glare light efficiently.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

25 - 25D

25°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81018268 - 3 - 90 - 27 - 25 - WH - D1
For complete code ordering information, please see page 232.

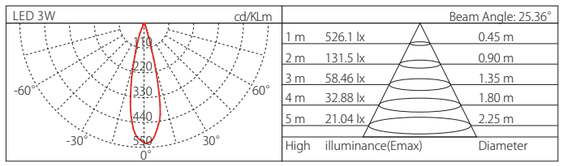


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

ALEX LED Hotel Recessed Downlight Collection





0.07Kg

IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81001111 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 197 lm

ALEX LED downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating and Plated finish.
Led driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam


15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey
DC - dark chrome

White Black Grey Dark Chrome

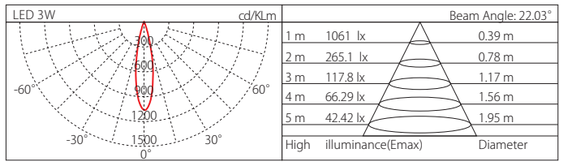

* IES files of different beam angle are available upon request.

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81001111 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

ALEX LED Hotel Recessed Downlight Collection





0.1Kg

IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81001112 5W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 433 lm

ALEX LED downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating and Plated finish.
Led driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam


24 - 24D
36 - 36D
55 - 55D

24° 36° 55°

Finish

WH - white
BK - black
GR - grey
DC - dark chrome

White Black Grey Dark Chrome

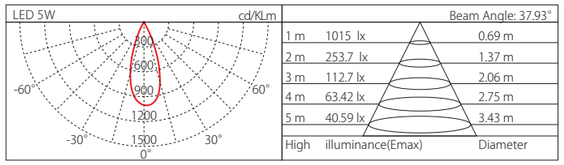

* IES files of different beam angle are available upon request.

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81001112 - 5 - 90 - 27 - 24 - WH - D1
For complete code ordering information, please see page 232.

ALEX LED Hotel Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81001113 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 578 lm

ALEX LED downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating and Plated finish.
Led driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam


24 - 24D
36 - 36D
55 - 55D

24° 36° 55°

Finish

WH - white
BK - black
GR - grey
DC - dark chrome

White Black Grey Dark Chrome

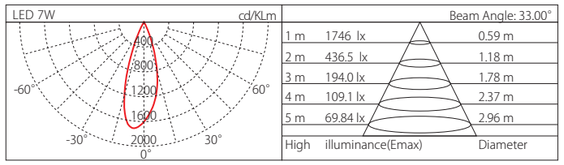

* IES files of different beam angle are available upon request.

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81001113 - 7 - 90 - 27 - 24 - WH - D1
For complete code ordering information, please see page 232.

ALEX LED Hotel Recessed Downlight Collection

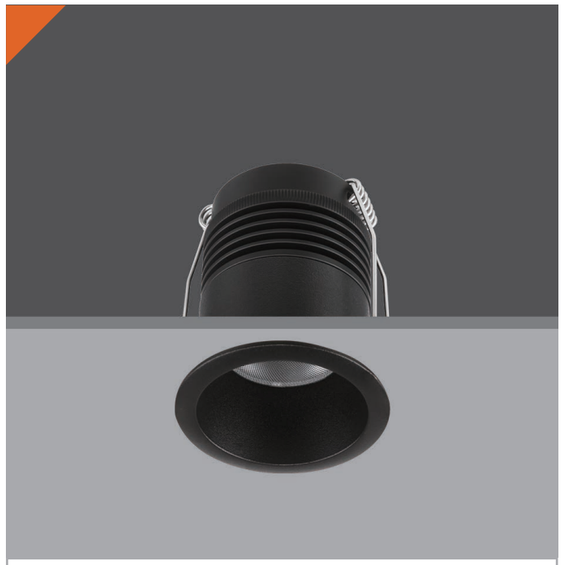



IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81001114 9W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 840 lm

ALEX LED downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating and Plated finish.
Led driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam


24 - 24D
36 - 36D
55 - 55D

24° 36° 55°

Finish

WH - white
BK - black
GR - grey
DC - dark chrome

White Black Grey Dark Chrome

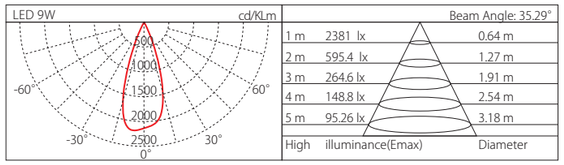

* IES files of different beam angle are available upon request.

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81001114 - 9 - 24 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.



DORIS LED Hotel Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.



Beam Angle: 37.9°		
1 m	723.1 lx	1.34 m
2 m	180.8 lx	2.68 m
3 m	80.34 lx	4.02 m
4 m	45.19 lx	5.36 m
5 m	28.92 lx	6.69 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81001091 5W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 288 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81001091 - 5 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.






IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Tilt adjustable.
Easy for installation and maintenance.

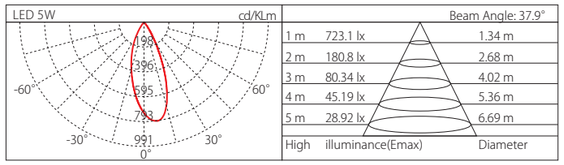

		Beam Angle: 37.9°
1 m	723.1 lx	1.34 m
2 m	180.8 lx	2.68 m
3 m	80.34 lx	4.02 m
4 m	45.19 lx	5.36 m
5 m	28.92 lx	6.69 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81001092 5W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 288 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81001092 - 5 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

DORIS LED Hotel Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

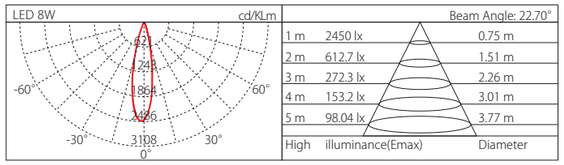

		Beam Angle: 22.70°
1 m	2450 lx	0.75 m
2 m	612.7 lx	1.51 m
3 m	272.3 lx	2.26 m
4 m	153.2 lx	3.01 m
5 m	98.04 lx	3.77 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81001093 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 335 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81001093 - 8 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

DORIS LED Hotel Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81001094 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 335 lm

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Tilt adjustable.
Easy for installation and maintenance.

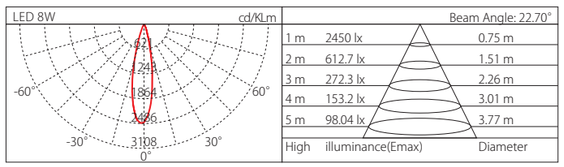

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81001094 - 8 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.







IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81001095 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 692 lm

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Beam Angle: 23.10°		
1 m	4870 lx	0.81m
2 m	1217 lx	1.62 m
3 m	541.2 lx	2.44 m
4 m	304.4 lx	3.25 m
5 m	194.8 lx	4.06 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

Ordering code sample:

81001095 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.





IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81001096 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 692 lm

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Tilt adjustable.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Beam Angle: 23.10°		
1 m	4870 lx	0.81m
2 m	1217 lx	1.62 m
3 m	541.2 lx	2.44 m
4 m	304.4 lx	3.25 m
5 m	194.8 lx	4.06 m
High	illuminance(Emax)	Diameter


* IES files of different beam angle are available upon request.

Ordering code sample:

81001096 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.


FASHION
FASHION
FASHION





IP20 3 SDCM

50,000hrs (Ta=25° C)
COB LED

81001097 18W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1318 lm

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

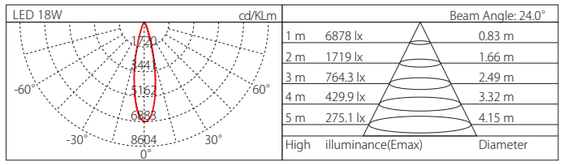


* IES files of different beam angle are available upon request.

Ordering code sample:

81001097 - 18 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

DORIS LED Hotel Recessed Downlight Collection





IP20 3 SDCM

50,000hrs (Ta=25° C)
COB LED

81001098 18W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1318 lm

DORIS is a professional downlight with small size, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Tilt adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95


CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

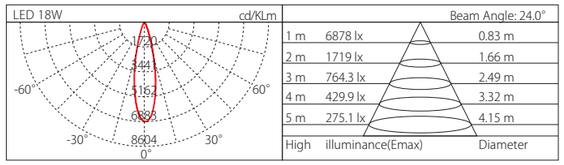

* IES files of different beam angle are available upon request.

Ordering code sample:


81001098 - 18 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.



Hongkou SOHO

LITO LED Hotel Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

LITO is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance

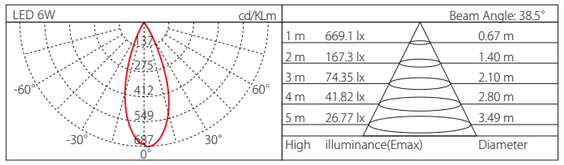

* IES files of different beam angle are available upon request.

81012660 6W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 326 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81012660 - 6 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012758 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 577 lm

LITO is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

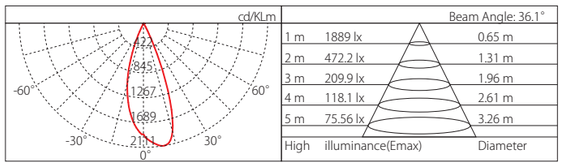

Beam Angle: 36.1°		
1 m	1889 lx	0.65 m
2 m	472.2 lx	1.31 m
3 m	209.9 lx	1.96 m
4 m	118.1 lx	2.61 m
5 m	75.56 lx	3.26 m
High	illuminance(Emax)	Diameter


* IES files of different beam angle are available upon request.

Ordering code sample:

81012758 - 8 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

LITO LED Hotel Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032380 10W 81032381 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 696 lm(10W) / 835 lm(12W)

LITO is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D
50 - 50D



Finish

WH - white
BK - black
GR - grey



Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

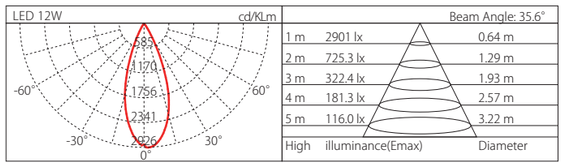

Beam Angle: 35.6°		
1 m	2901 lx	0.64 m
2 m	725.3 lx	1.29 m
3 m	322.4 lx	1.93 m
4 m	181.3 lx	2.57 m
5 m	116.0 lx	3.22 m
High	illuminance(Emax)	Diameter


* IES files of different beam angle are available upon request.

Ordering code sample:

81032380 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

LITO LED Hotel Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012140 15W **81012870** 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1395 lm(15W) / 1860 lm(20W)

LITO is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

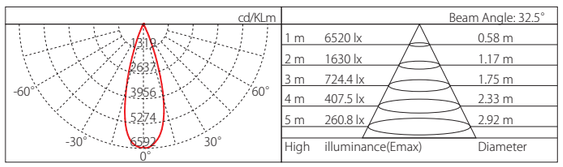

Beam Angle: 32.5°		
1 m	6520 lx	0.58 m
2 m	1630 lx	1.17 m
3 m	724.4 lx	1.75 m
4 m	407.5 lx	2.33 m
5 m	260.8 lx	2.92 m
High	illuminance(Emax)	Diameter


* IES files of different beam angle are available upon request.

Ordering code sample:

81012140 - 15 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ALITO LED Hotel Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81052828 6W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 326 lm

ALITO is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

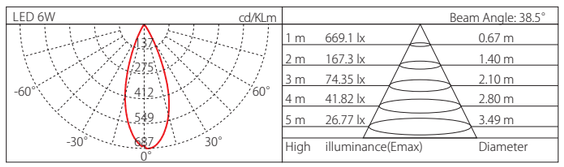

Beam Angle: 38.5°		
1 m	669.1 lx	0.67 m
2 m	167.3 lx	1.40 m
3 m	74.35 lx	2.10 m
4 m	41.82 lx	2.80 m
5 m	26.77 lx	3.49 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.


Ordering code sample:

81052828 - 6 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.



ALITO LED Hotel Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81053298 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 577 lm

ALITO is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.




Beam Angle: 36.1°		
1 m	1889 lx	0.65 m
2 m	472.2 lx	1.31 m
3 m	209.9 lx	1.96 m
4 m	118.1 lx	2.61 m
5 m	75.56 lx	3.26 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam
15 - 15D
24 - 24D
36 - 36D



Finish
WH - white
BK - black
GR - grey



Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:
81053298 - 8 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

ALITO LED Hotel Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81012928 10W **81053308** 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 696 lm(10W) / 835 lm(12W)

ALITO is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

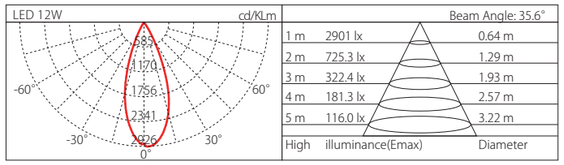

* IES files of different beam angle are available upon request.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D
50 - 50D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81012928 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ALITO LED Hotel Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032110 15W **81032128** 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1395 lm(15W) / 1860 lm(20W)

ALITO is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

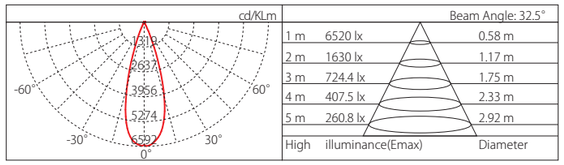

* IES files of different beam angle are available upon request.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81032110 - 15 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

LUX Professional Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

LUX is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

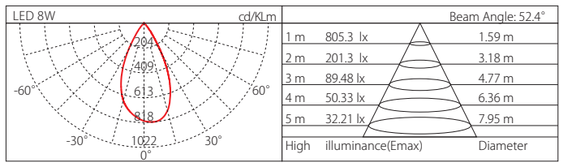

* IES files of different beam angle are available upon request.

81053318 6W 81032900 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 420 lm(6W) / 560 lm(8W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81053318 - 6 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.



* Lumen output is concerned with different CCT.





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81053328 6W 81032968 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 420 lm(6W) / 560 lm(8W)

LUX is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

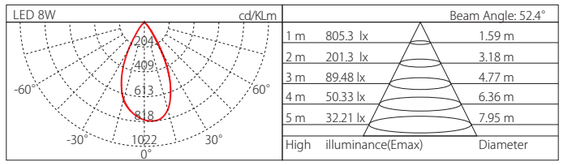


* IES files of different beam angle are available upon request.

Ordering code sample:

81053328 - 6 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

LUX Professional Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032288 10W 81012080 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 880 lm(10W) / 1320 lm(15W)

LUX is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector


DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

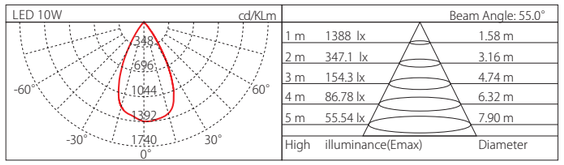


* IES files of different beam angle are available upon request.

Ordering code sample:

81032288 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

LUX Professional Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

LUX is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

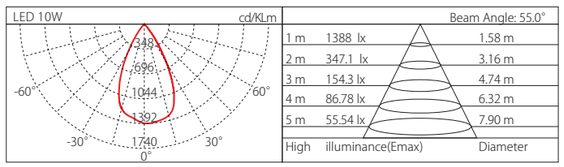

* IES files of different beam angle are available upon request.

81032540 10W 81012090 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 880 lm(10W) / 1320 lm(15W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032540 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81054448 20W 81054818 25W 81054858 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm(20W) / 1750 lm(25W) / 2100 lm(30W)

LUX is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81054448 - 20 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

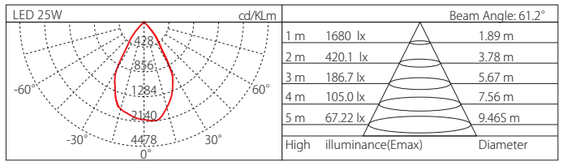

* IES files of different beam angle are available upon request.

LUX Professional Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81053068 20W 81054878 25W 81054908 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm(20W) / 1750 lm(25W) / 2100 lm(30W)

LUX is a professional downlight with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81053068 - 20 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

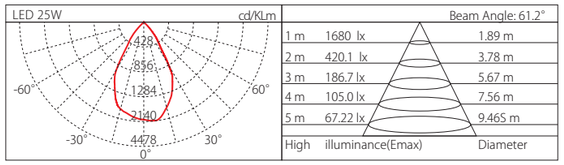

* IES files of different beam angle are available upon request.

ALUX Professional Trimless Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81012787 6W 81032318 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 420 lm(6W) / 560 lm(8W)

ALUX is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

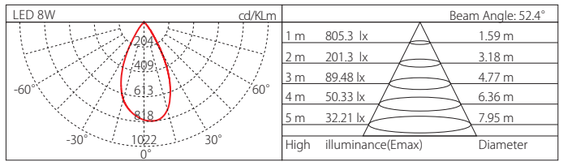

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam
15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81012787 - 6 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ALUX Professional Trimless Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032878 6W 81032518 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 420 lm(6W) / 560 lm(8W)

ALUX is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

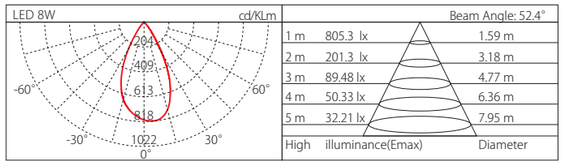

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam
15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81032878 - 6 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ALUX Professional Trimless Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032668 10W 81032708 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 880 lm(10W) / 1320 lm(15W)

ALUX is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

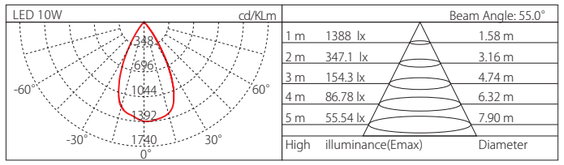

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032668 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ALUX Professional Trimless Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032328 10W 81032080 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 880 lm(10W) / 1320 lm(15W)

ALUX is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

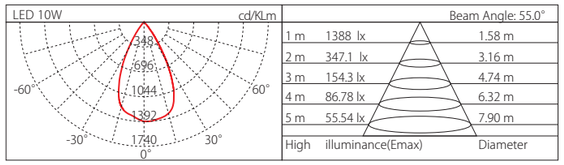

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032328 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.








IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

ALUX is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

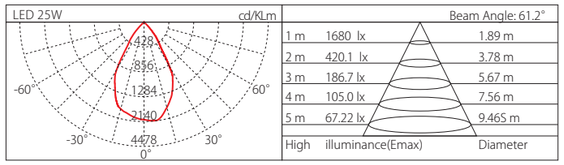

* IES files of different beam angle are available upon request.

81032170 20W 81033348 25W 81052768 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm(20W) / 1750 lm(25W) / 2100 lm(30W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032170 - 20 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information,
please see page 232.

ALUX Professional Trimless Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

ALUX is a professional downlight with trimless structure, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

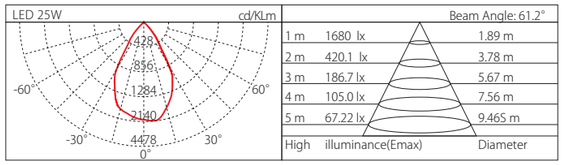

* IES files of different beam angle are available upon request.

81032180 20W 81033358 25W 81052778 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm(20W) / 1750 lm(25W) / 2100 lm(30W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
55 - 55D

15° 24° 36° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81032180 - 20 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information,
please see page 232.





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032900 10W 81054428 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 800 lm(10W) / 1200 lm(15W)

ROX Professional Square Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

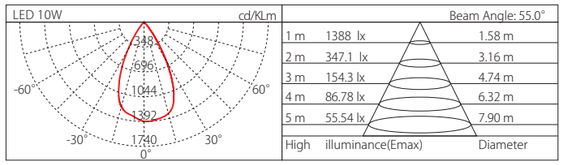

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam
15 - 15D
24 - 24D
36 - 36D
60 - 60D

15° 24° 36° 60°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81032900 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ROX Professional Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032978 10W 81012130 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 800 lm(10W) / 1200 lm(15W)

ROX Professional Square Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

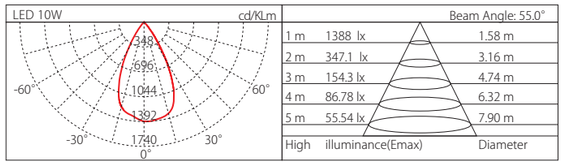

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam
15 - 15D
24 - 24D
36 - 36D
60 - 60D

15° 24° 36° 60°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81032978 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

ROX Professional Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032968 10W 81053038 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 600 lm(10W) / 900 lm(15W)

ROX Professional Square Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam
00 - asymmetry

Asymmetry

Finish
WH - white
BK - black
GR - grey

White Black Grey

Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:
81032968 - 10 - 90 - 27 - 00 - WH - DL - D1
For complete code ordering information,
please see page 232.

* Lumen output is concerned with different CCT.

AROX Professional Trimless Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81053568 10W 81032090 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 800 lm(10W) / 1200 lm(15W)

AROX Professional Trimless Recessed Downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel,high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

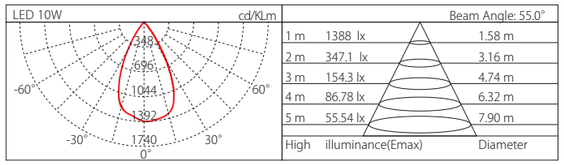

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam
15 - 15D
24 - 24D
36 - 36D
60 - 60D

15° 24° 36° 60°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Reflector
DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81053568 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information,
please see page 232.

* Lumen output is concerned with different CCT.





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032538 10W 81012150 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 800 lm(10W) / 1200 lm(15W)

AROX Professional Trimless Recessed Downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel,high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

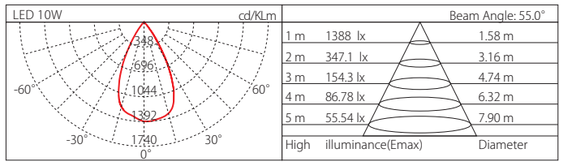

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D
60 - 60D

15° 24° 36° 60°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032538 - 10 - 90 - 27 - 15 - WH - DL - D1
For complete code ordering information, please see page 232.

AROX Professional Trimless Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032528 10W 81032100 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 600 lm(10W) / 900 lm(15W)

AROX Professional Trimless Recessed Downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel,high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

00 - asymmetry

Asymmetry

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
CR - chrome
MB - mat black
MW - mat white

darklight chrome mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81032528 - 10 - 90 - 27 - 00 - WH - DL - D1
For complete code ordering information, please see page 232.

CORE PRO

★ Recessed Downlight



1. Pure aluminium
2. Excellent glare control
3. Dark light technology
4. Deliver soft and even light

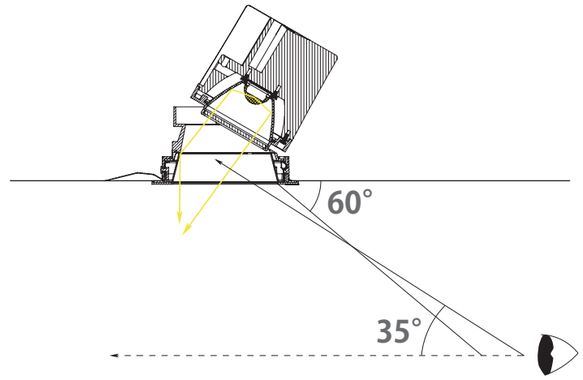

Shield Angle 60°


Application area:
Shopping mall, retail shops, lobby,
exhibition & display area.

Uniform Glare Value (UGR) should be used to evaluate uncomfortable glare in common rooms or places in industrial and public buildings. The UGR value is calculated according to the formula provided in Appendix A of GB50034-2004, which is omitted. The UGR values are divided into 7 grades: 28, 25, 22, 19, 16, 13, and 10. Grade 28 is intolerable value, 25 is uncomfortable value, 22 is a bit less than uncomfortable value, 19 is the limit value between comfortable and uncomfortable, 16 is acceptable value, 13 can barely glare value, 10 is no glare value. Most of the illuminance standards of GB50043-2004 adopt UGR values of grade 25, 22 and 19.

As a professional commercial lighting provider, well-controlled anti-glare is a key point of consideration before we designed a downlight, we aim to deliver a comfortable light to the end users.
Through professional optic design and special anti-glare treatment, the UGR value of this collection downlight is from ⩽18 to ⩽11, which is lower than the recommended value of the illuminance standard, this value is also within the scope of human eye glare comfort. Within the comfortable angle of the light, our eyes will not feel any strong light from the luminaire.



IP20 3 SDCM

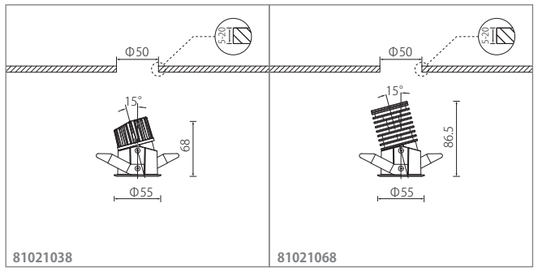

0.35Kg 0.38Kg

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）


COB LED

81021038 6W 81021068 8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 354 lm(6W) / 470lm(8W)

CORE PRO is a tiny recessed downlight with elegant and compact design, it is featured with saturated color and high color rendering index. Four different kinds of reflectors for choice to achieve the perfect lighting effect, multi-functional for both fixed and adjustable application. IP44 rating to ensure it can be applicable for humid environment, it is widely used for hotel,villa, high-class club, commercial lighting area etc…

Die-casting aluminium housing with powdercoating finish.
Deep-in design structure to minimize glare light efficiently, there are various of reflectors like dark light reflector, glossy aluminium reflector, satin reflector, mat black reflector for option.
IP44 to ensure it can be applicable for humid environment.
Different of optic accessories are for choices, extrusion glass diffuser, honeycomb louvre, soft glass diffuser, to meet the different design requirements.
Adjustable angle: ±15°.
Avoid using acids or alkalis detergents and other corrosive solvents to clean the fitting.

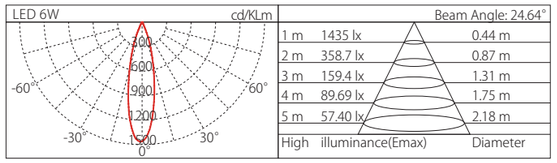

		Beam Angle: 24.64°
1 m	1435 lx	0.44 m
2 m	358.7 lx	0.87 m
3 m	159.4 lx	1.31 m
4 m	89.69 lx	1.75 m
5 m	57.40 lx	2.18 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81021038 - 6 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.



IP20 3 SDCM



0.31Kg

63° Glare comfort cut off angle

50,000hrs（Ta=25°C）


COB LED

81032880 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 650 lm(10W)

CORE PRO LED downlight is with slim trim, simple and elegant design, easy for installation. Using latest new COB technology.It's suitable for office building, shopping mall, hotel, high class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish in White and Black.
High purity anodized aluminium reflector, minimized glare light efficiently.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.

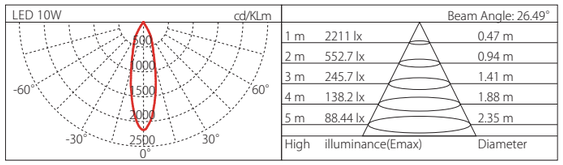

		Beam Angle: 26.49°
1 m	2211 lx	0.47 m
2 m	552.7 lx	0.94 m
3 m	245.7 lx	1.41 m
4 m	138.2 lx	1.88 m
5 m	88.44 lx	2.35 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

26 - 26D
32 - 32D

26° 32°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032880 - 10 - 90 - 27 - 26 - WH - DL - D1
For complete code ordering information, please see page 232.

CORE PRO Professional Recessed Downlight Collection






71° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

CORE PRO LED downlight is with slim trim, simple and elegant design, easy for installation. Using latest new COB technology.It's suitable for office building, shopping mall, hotel, high class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish in White and Black.
High purity anodized reflector, minimized glare light efficiently.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.



		Beam Angle: 24.86°
1 m	986.6 lx	0.44 m
2 m	246.7 lx	0.88 m
3 m	109.6 lx	1.32 m
4 m	61.67 lx	1.76 m
5 m	39.47 lx	2.20 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81032890 10W


Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 650 lm(10W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95


CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

26 - 26D
32 - 32D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81032890 - 10 - 90 - 27 - 26 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

CORE PRO Professional Recessed Downlight Collection





IP20 3 SDCM

55° Glare comfort cut off angle

50,000hrs（Ta=25° C）


COB LED

81054408 15W 81054438 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1280 lm(15W) / 1670 lm(20W)

CORE PRO is a professional downlight with high lumen output, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity aluminium reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

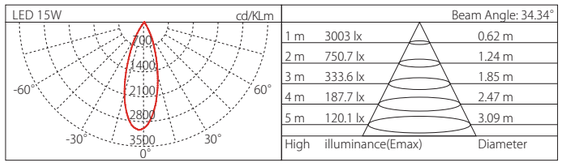

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

18 - 18D
24 - 24D
38 - 34D

18° 24° 34°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81054438 - 15 - 90 - 27 - 18 - WH - DL - D1
For complete code ordering information, please see page 232.

CORE PRO Professional Recessed Downlight Collection





IP20 3 SDCM

73° Glare comfort cut off angle

50,000hrs（Ta=25° C）


COB LED


81053008 15W 81053058 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1100 lm(15W) / 1460 lm(20W)

CORE PRO is a professional wallwasher downlight with high lumen output, compact and elegant design, easy for installation. Multi-functional for either horizontal or vertical adjustable. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity aluminium reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

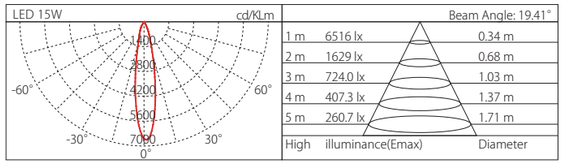

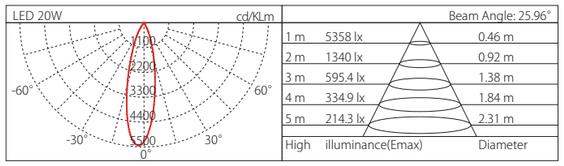

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

18 - 18D
24 - 24D
34 - 34D

18° 24° 34°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81053008 - 15 - 90 - 27 - 18 - WH - DL - D1
For complete code ordering information, please see page 232.


HAPPINESS IS DOUBLE POINTS ON YOUR 1ST BILL UPLOAD.
LuLu MALL
World of Happiness
Lens magic
THE BOMBAY STORE
PETER ENGLAND
Hush Puppies
SO YOU SHOP SAFELY
Perfume Bar
information desk
JOSCO JEWELLERS
NYKAA LUXE
MANGO
Happy Woman's Day
Everything at 20% off





IP20 3 SDCM

54° Glare comfort cut off angle

50,000hrs（Ta=25°C）


COB LED

81054608 20W **81054808** 26W
81054838 30W **81054638** 34W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1600 lm(20W) / 1880 lm(26W) / 2060 lm(30W) / 2500 lm(34W)

CORE PRO is a professional downlight with high lumen output, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity aluminium reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

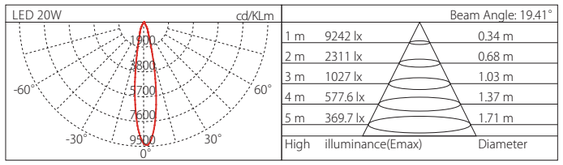

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

18 - 18D
24 - 24D
36 - 36D
45 - 45D

18° 24° 36° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81054608 - 20 - 90 - 27 - 18 - WH - DL - D1
For complete code ordering information, please see page 232.





IP20 3 SDCM

70° Glare comfort cut off angle

50,000hrs（Ta=25°C）


COB LED

81053098 20W **81054868** 26W
81054898 30W **81053258** 34W

Input Voltage:AC 220V~240V 50Hz/60Hz
Lumens: 1560 lm(20W) / 1830 lm(26W) / 2120 lm(30W) / 2440 lm(34W)

CORE PRO is a professional wallwasher downlight with high lumen output, compact and elegant design, easy for installation. Multi-functional for either horizontal or vertical adjustable. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
With both optical lens and high purity aluminium reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 0-30°.
Easy for installation and maintenance.

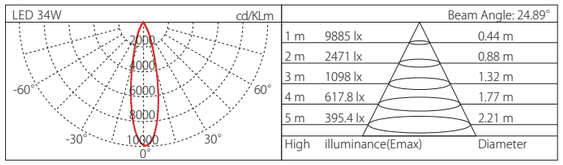

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

18 - 18D
24 - 24D
36 - 36D
45 - 45D

18° 24° 36° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81053098 - 20 - 90 - 27 - 18 - WH - DL - D1
For complete code ordering information, please see page 232.

CORE PRO Professional Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032118 20W **81033208** 26W
81032088 30W **81032058** 34W
81033010 38W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1880 lm(20W) / 2230 lm(26W) / 2760 lm(30W) / 3140 lm(34W) / 3920 lm(38W)

CORE PRO is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. With simple and elegant design, easy for installation. Using latest new COB technology. IP65 rated version make it more stronger and wider use in an tough environment.

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

12 - 12D
22 - 22D
36 - 36D
60 - 60D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81032118 - 20 - 90 - 27 - 12 - WH - D1
For complete code ordering information, please see page 232.

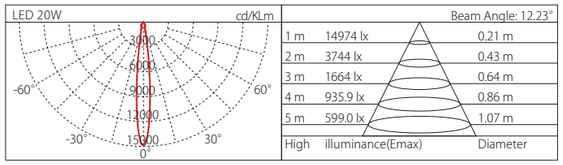

* IES files of different beam angle are available upon request.

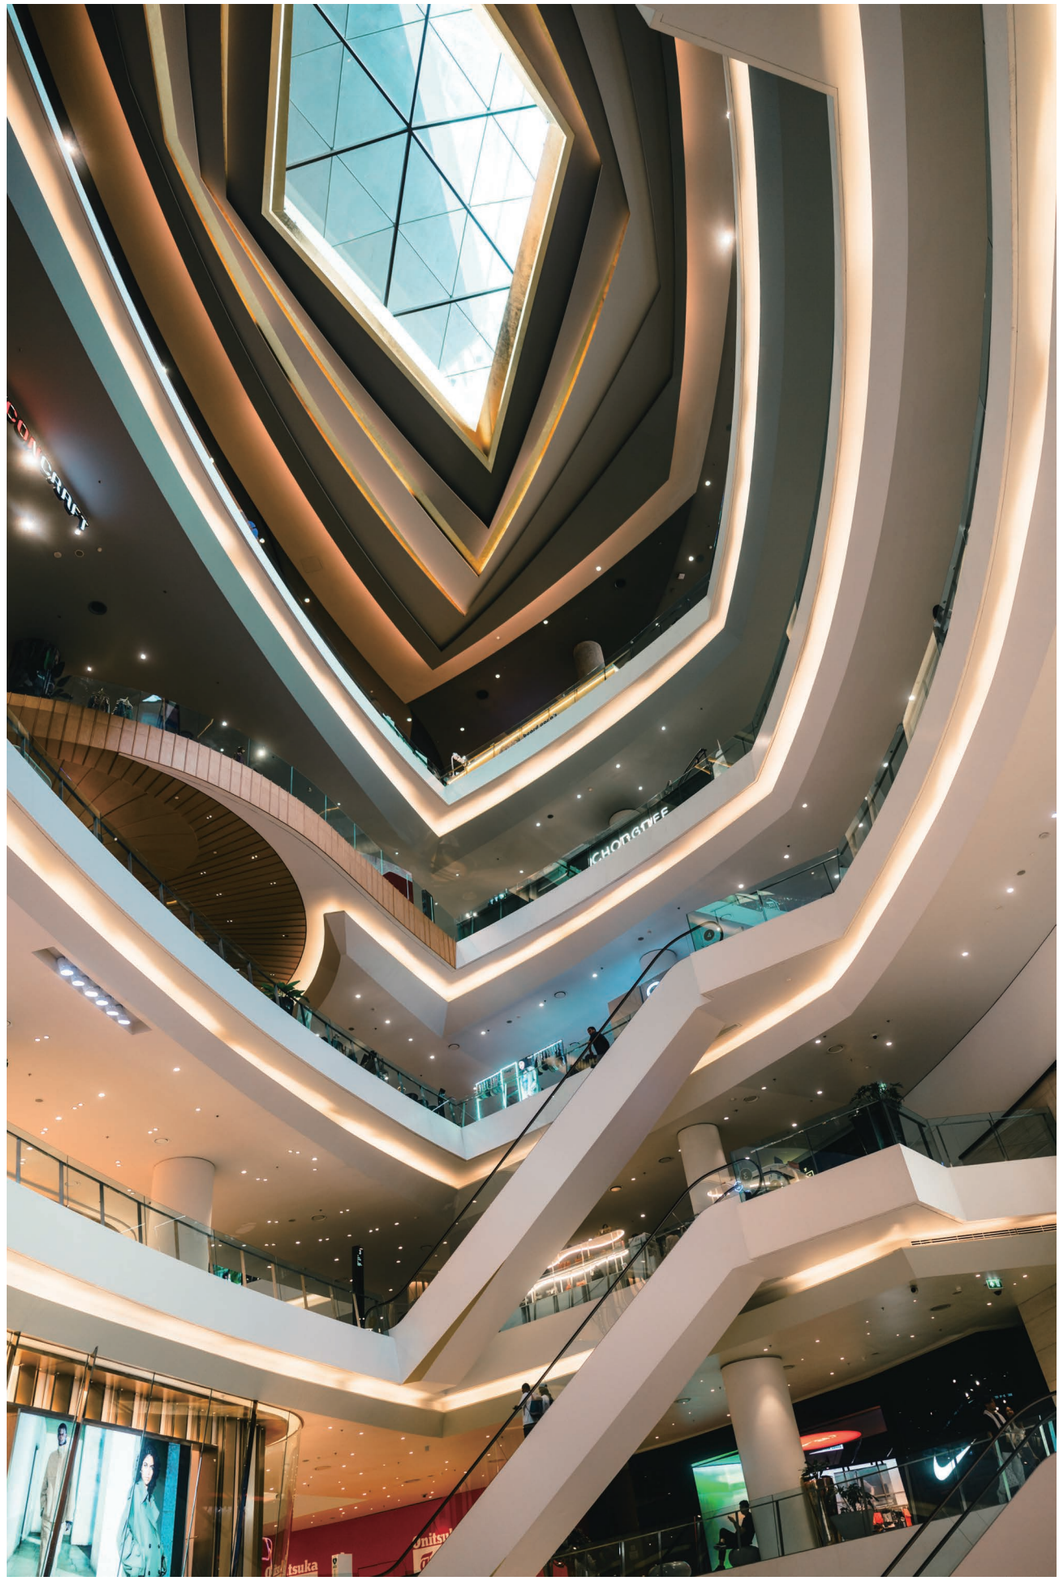


* Lumen output is concerned with different CCT.



CORE PRO Professional Recessed Downlight Collection






50,000hrs（Ta=25° C）
COB LED

81054508 20W **81054928** 26W
81054548 30W **81054968** 38W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens:1780 lm(20W) / 2170 lm(26w) / 2280 lm(30W) / 3840 lm(38W)

CORE PRO is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, high class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
Different color of reflector is optional, glossy aluminium, matt silver, white, black.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.

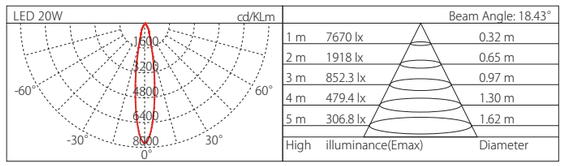

* IES files of different beam angle are available upon request.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

12 - 12D
22 - 22D
36 - 36D
60 - 60D



Finish

WH - white
BK - black
GR - grey



Reflector

ST - satin
MB - mat black
MW - mat white



Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81054508 - 20 - 90 - 27 - 12 - WH - ST - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

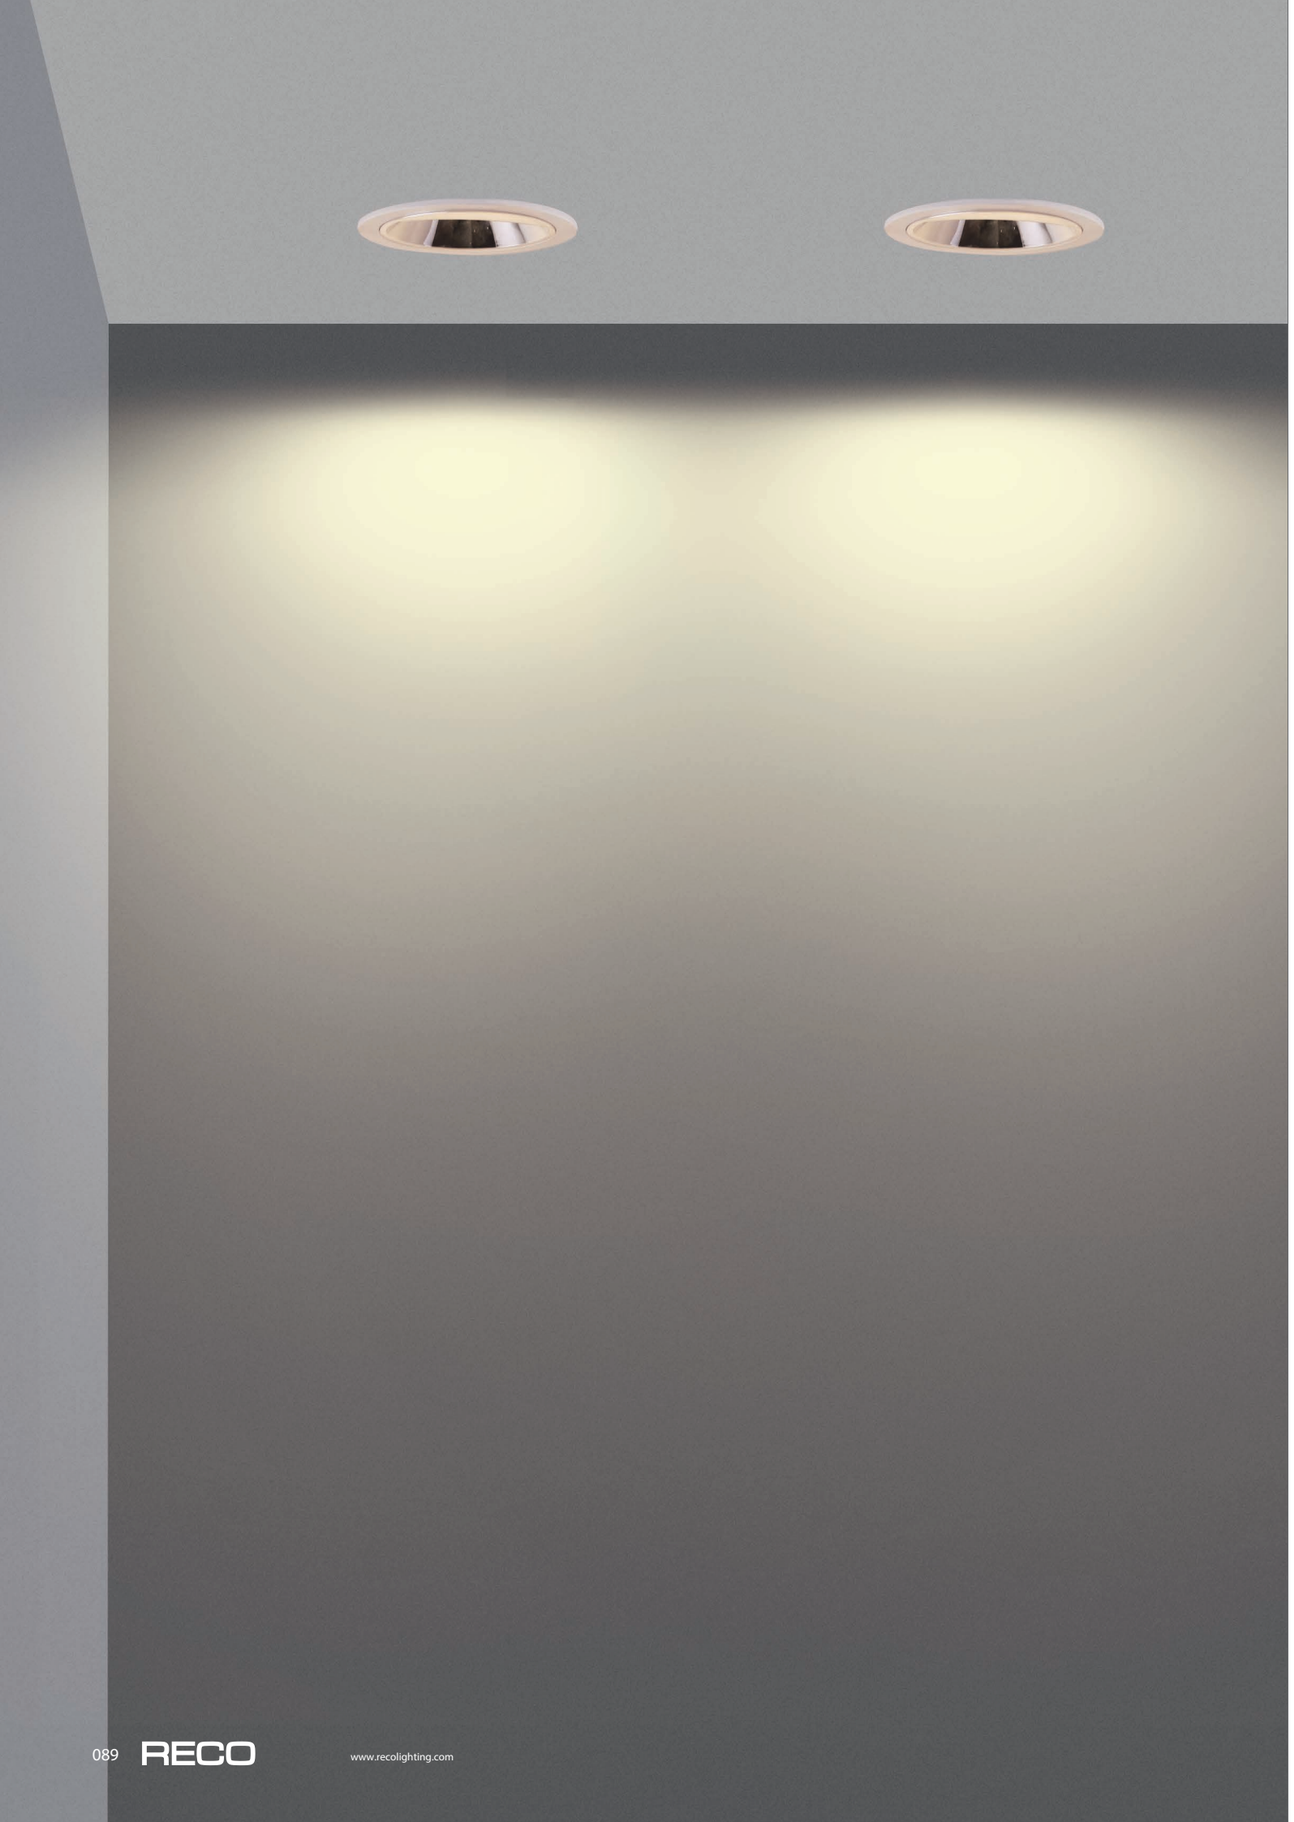

SIDE Wallwasher Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

SIDE is a professional wallwasher downlight, with unique and technical assymetric optic, it could deliver an even and wide assymetrical light. Simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, high class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

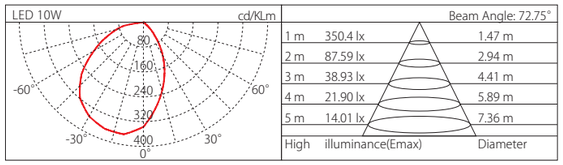

* IES files of different beam angle are available upon request.

81012718 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 568 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

00 - wallwasher

Wallwasher

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012718 - 10 - 90 - 27 - 00 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

SIDE Wallwasher Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81054418 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 975 lm

SIDE is a professional wallwasher downlight, with unique and technical assymetric optic, it could deliver an even and wide assymetrical light. Simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, high class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

00 - wallwasher



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81054418 - 15 - 90 - 27 - 00 - WH - D1
For complete code ordering information, please see page 232.

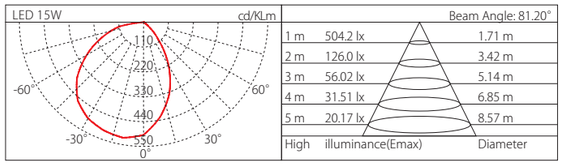


Beam Angle: 81.20°		
1 m	504.2 lx	1.71 m
2 m	126.0 lx	3.42 m
3 m	56.02 lx	5.14 m
4 m	31.51 lx	6.85 m
5 m	20.17 lx	8.57 m
High illuminance(Emax)		Diameter

* IES files of different beam angle are available upon request.

SIDE Wallwasher Recessed Downlight Collection





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81054618 20W 81054848 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1300 lm(20W) / 1950 lm(30W)

SIDE is a professional wallwasher downlight, with unique and technical assymetric optic, it could deliver an even and wide assymetrical light. Simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, high class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

00 - wallwasher



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81054618 - 20 - 90 - 27 - 00 - WH - D1
For complete code ordering information, please see page 232.

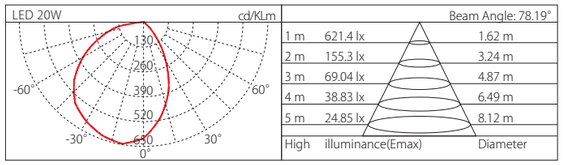



Beam Angle: 78.19°		
1 m	621.4 lx	1.62 m
2 m	155.3 lx	3.24 m
3 m	69.04 lx	4.87 m
4 m	38.83 lx	6.49 m
5 m	24.85 lx	8.12 m
High illuminance(Emax)		Diameter

* IES files of different beam angle are available upon request.




BRIM II Professional Recessed Downlight Collection

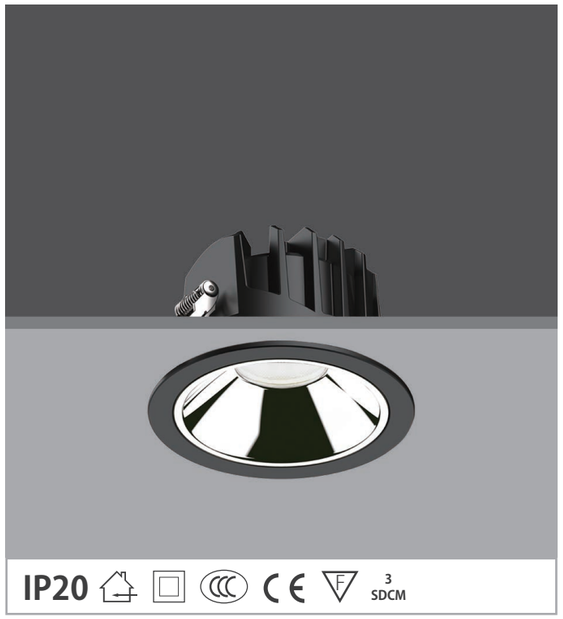



BRIM II is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. Especially for the area which has limit of height. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, highclass club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Different color of PC reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

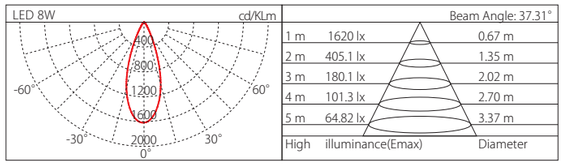

* IES files of different beam angle are available upon request.

50,000hrs（Ta=25° C）
COB LED

81054318 8W **81021078** 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 726 lm(8W) / 836 lm(10W)


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

24 - 24D
38 - 38D
55 - 55D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
BB - bright black
BW - bright white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81054318 - 8 - 90 - 27 - 24 - WH - DL - D1
For complete code ordering information,
please see page 232.

* Lumen output is concerned with different CCT.

BRIM II Professional Recessed Downlight Collection





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81054328 12W **81012610** 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1038 lm(12W) / 1213 lm(15W)

BRIM II is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. Especially for the area which has limit of height. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, highclass club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Different color of PC reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

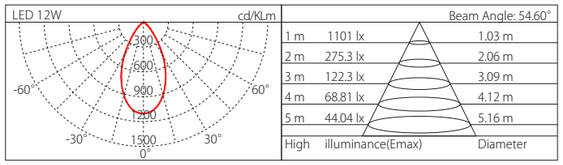

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

24 - 24D
38 - 38D
55 - 55D

24° 38° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
BB - bright black
BW - bright white

darklight satin bright black bright white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable


Ordering code sample:

81054328 - 12 - 90 - 27 - 24 - WH - DL - D1
For complete code ordering information, please see page 232.


Shenzhen OneJee Hotel

BRIM II Professional Recessed Downlight Collection

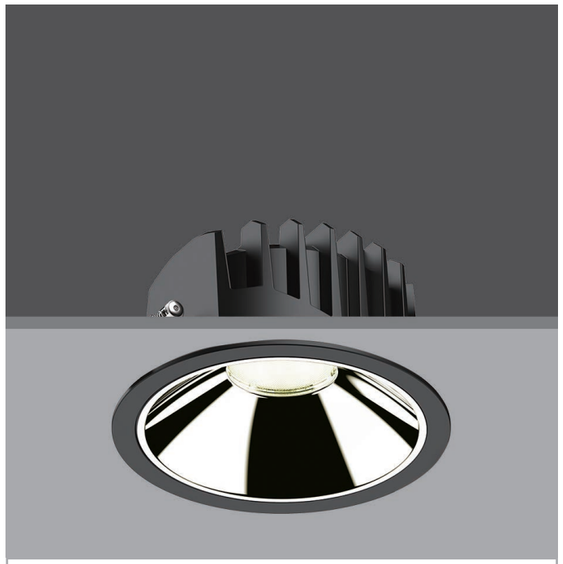



IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032160 20W **81033218** 26W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1678 lm(20W) / 1940 lm(26W)

BRIM II is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. Especially for the area which has limit of height. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, highclass club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Different color of PC reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

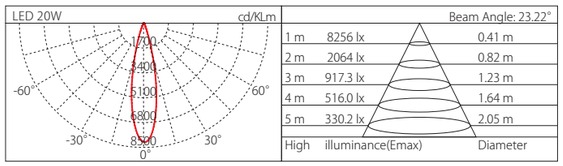

* IES files of different beam angle are available upon request.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

24 - 24D
38 - 38D
55 - 55D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
BB - bright black
BW - bright white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI





Ordering code sample:

81032160 - 20 - 90 - 27 - 24 - WH - DL - D1
For complete code ordering information, please see page 232.



The Exchang SOHO Shanghai

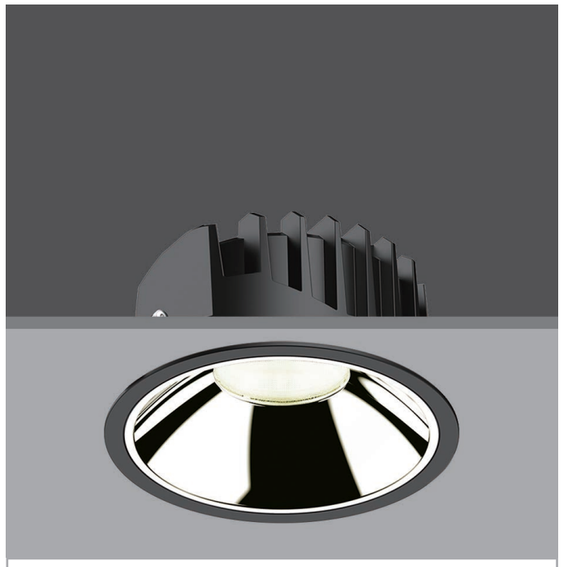



IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81032138 25W 81032098 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2000 lm(25W) / 2400 lm(30W)

BRIM II is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. Especially for the area which has limit of height. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, highclass club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

24 - 24D
38 - 38D
55 - 55D

24° 38° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
BB - bright black
BW - bright white

darklight satin bright black bright white


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable


Ordering code sample:

81032138 - 25 - 90 - 27 - 24 - WH - DL - D1
For complete code ordering information, please see page 232.

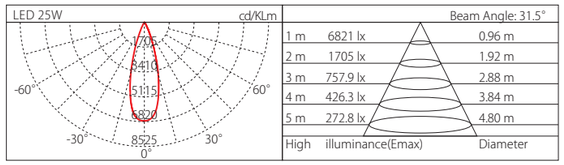

* IES files of different beam angle are available upon request.

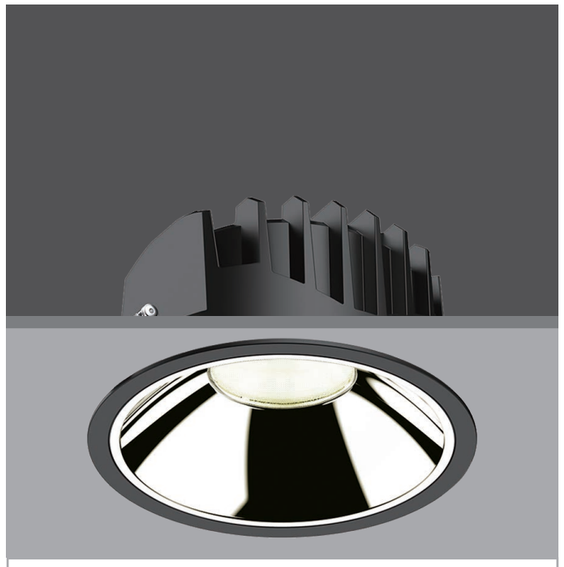



IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81032418 30W 81032068 34W 81033020 38W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2196 lm(30W) / 2411 lm(34W) / 2664 lm(38W)

BRIM II is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. Especially for the area which has limit of height. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, highclass club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

24 - 24D
38 - 38D
55 - 55D

24° 38° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
BB - bright black
BW - bright white

darklight satin bright black bright white


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81032418 - 30 - 90 - 27 - 24 - WH - DL - D1
For complete code ordering information, please see page 232.

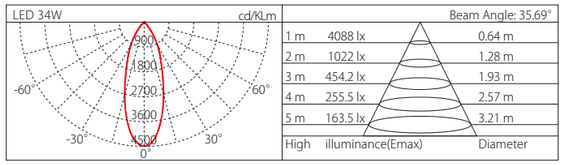

* IES files of different beam angle are available upon request.

BRIM II Professional Recessed Downlight Collection






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

BRIM II is a professional high lumen output LED downlight, excellent anti-glare control, can meet different requirement for your space. Especially for the area which has limit of height. With simple and elegant design, easy for installation. Using latest new COB technology. It's suitable for office building, shopping mall, hotel, highclass club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Driver is connected externally.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Easy for installation and maintenance.
Suitable for less than 30mm different thickness of ceiling type.

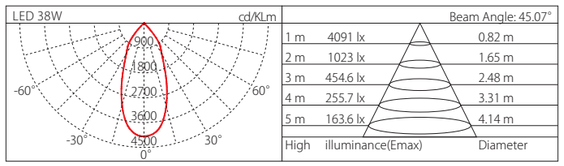

* IES files of different beam angle are available upon request.

81033030 38W **81032568** 45W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3037 lm(38W) / 3241 lm(45W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

24 - 24D
38 - 38D
55 - 55D

24° 38° 55°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
BB - bright black
BW - bright white

darklight satin bright black bright white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81033030 - 38 - 90 - 27 - 24 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.


LINO

LED Linear Recessed Downlight

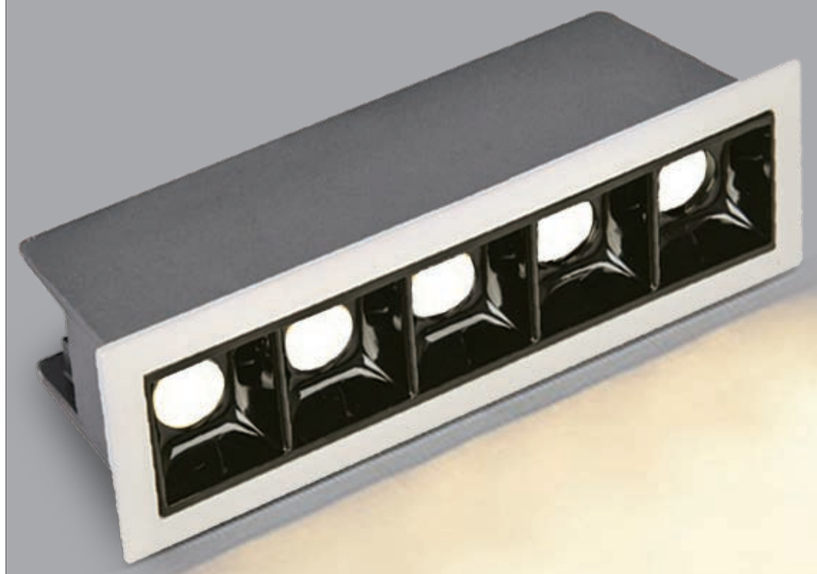

LINO LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81032898.1T 3W


Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 160 lm

LINO LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81032898.1T - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

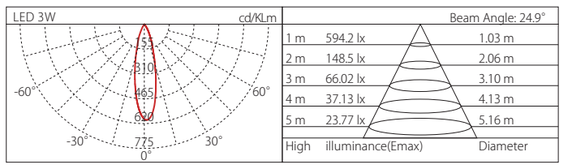

* IES files of different beam angle are available upon request.

LINO LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81032898.3T 4W


Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 260 lm

LINO LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81032898.3T - 4 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

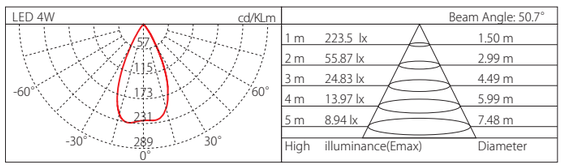

* IES files of different beam angle are available upon request.

LINO LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81032898.5T 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 700 lm

LINO LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81032898.5T - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

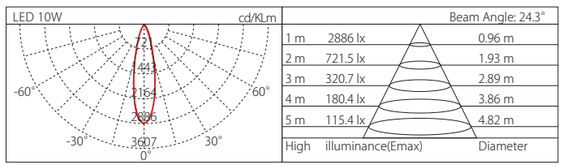

* IES files of different beam angle are available upon request.

LINO LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81032898.9T 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1300 lm

LINO LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81032898.9T - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* IES files of different beam angle are available upon request.

LINO LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81032898.15T 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2105 lm

LINO LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81032898.15T - 30 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

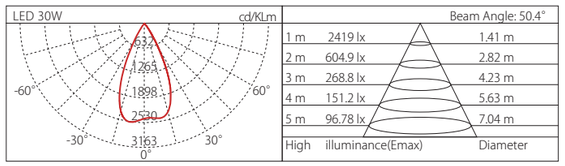


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

LINO II LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81052898.1T 5W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 417 lm

LINO II LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

12 - 12D
23 - 23D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81052898.1T - 5 - 90 - 27 - 12 - WH - D0
For complete code ordering information, please see page 232.

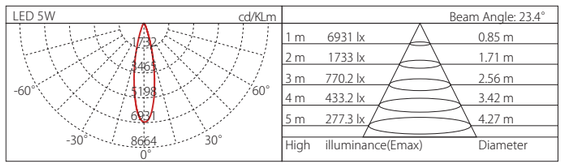


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

LINO II LED Linear Recessed Downlight





IP20 CE F 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81052898.3T 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1001 lm

LINO II LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

12 - 12D
23 - 23D
38 - 38D
50 - 50D

12° 23° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81052898.3T - 12 - 90 - 27 - 12 - WH - D0
For complete code ordering information, please see page 232.

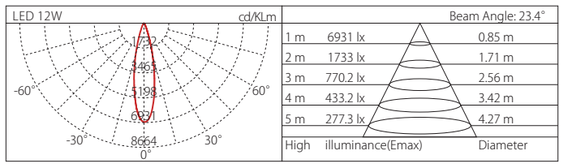


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

LINO II LED Linear Recessed Downlight





IP20 CE F 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81052898.5T 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1668 lm

LINO II LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

12 - 12D
23 - 23D
38 - 38D
50 - 50D

12° 23° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81052898.5T - 20 - 90 - 27 - 12 - WH - D0
For complete code ordering information, please see page 232.

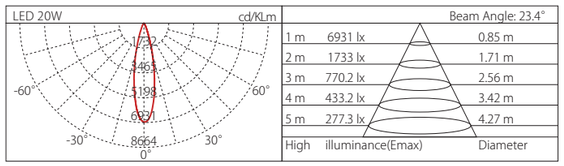


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

LINO II LED Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81052898.10T 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3275 lm

LINO II LED linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

12 - 12D
23 - 23D
38 - 38D
50 - 50D

12° 23° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81052898.10T - 40 - 90 - 27 - 12 - WH - D0
For complete code ordering information, please see page 232.

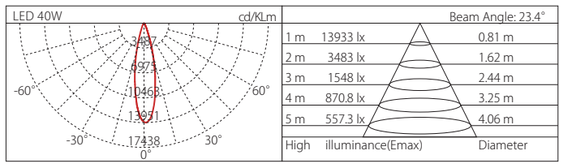


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

ALINO LED Trimless Linear Recessed Downlight

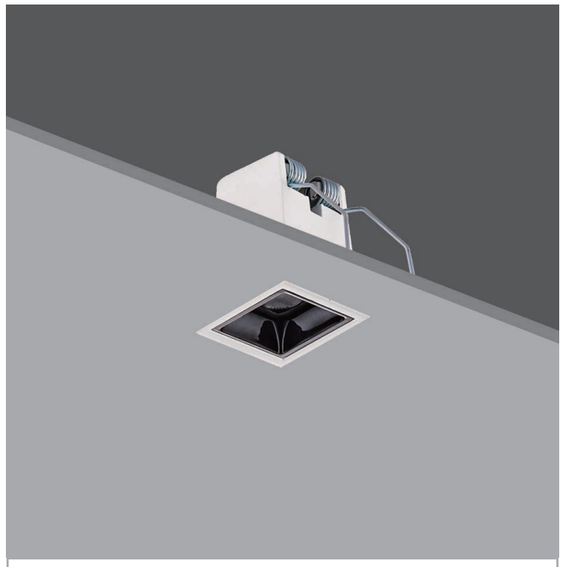



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81021038.05 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 160 lm

ALINO LED trimless linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D

22° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81021038.05 - 3 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

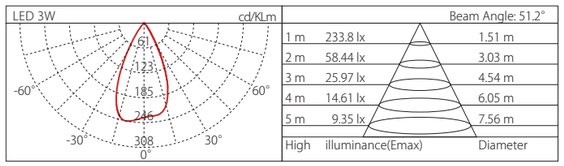


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT. www.recolighting.com

ALINO LED Trimless Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81054308 4W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 260 lm

ALINO LED trimless linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81054308 - 4 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

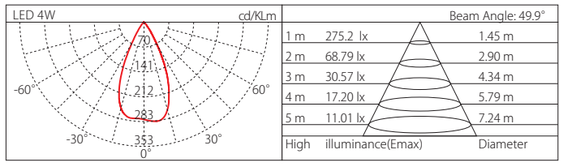


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

ALINO LED Trimless Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81052688 10W

Input Voltage:AC 220V~240V 50Hz/60Hz
Lumens: 800 lm

ALINO LED trimless linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

22 - 22D
38 - 38D
50 - 50D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81052688 - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

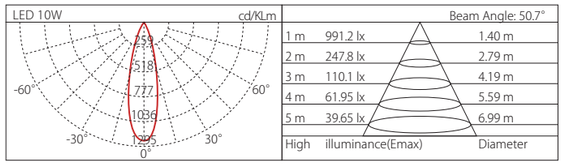


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT. www.recolighting.com

ALINO LED Trimless Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81032548 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1300 lm

ALINO LED trimless linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D

22° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81032548 - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

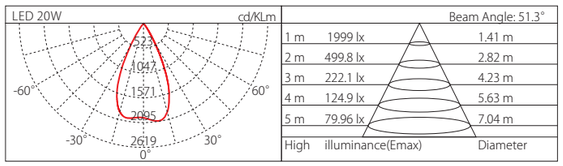


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

ALINO LED Trimless Linear Recessed Downlight





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

81054558 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2105 lm

ALINO LED trimless linear recessed downlight is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D

22° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81054558 - 30 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

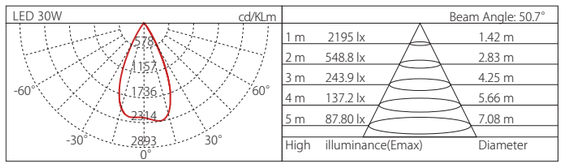


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT. www.recolighting.com

SLINE LED Surface Linear Light

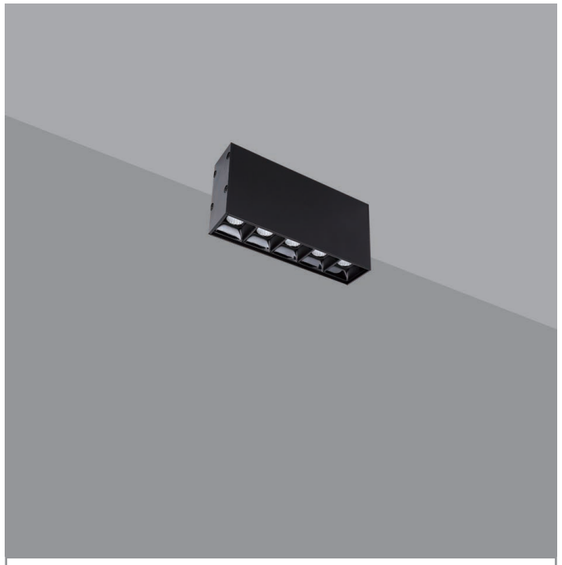



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83603710 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 800 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D

22° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:


83630710 - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

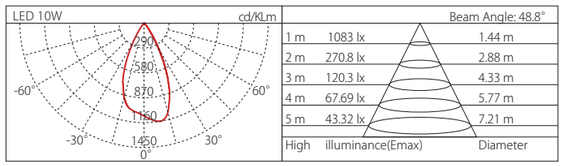

* IES files of different beam angle are available upon request.

SLINE LED Surface Linear Light

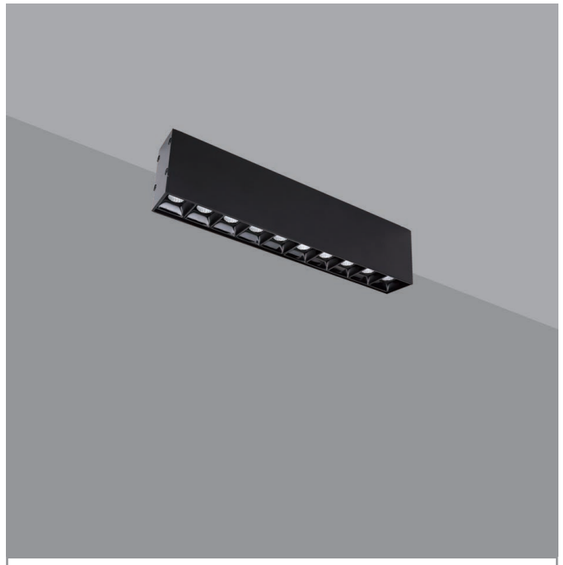



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83630711 20W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1300 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D

22° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


83630711 - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

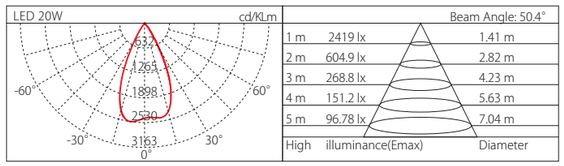

* IES files of different beam angle are available upon request.

SLINE LED Surface Linear Light





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83630712 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2105 lm

SLINE LED surface linear light is with simple and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Built-in driver.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

22 - 22D
38 - 38D
50 - 50D

22° 38° 50°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:


83630712 - 30 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

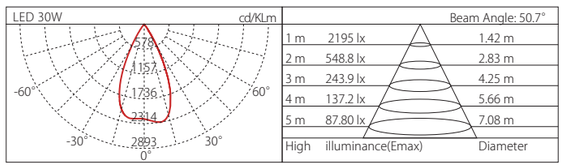

* IES files of different beam angle are available upon request.

SLINE LED Surface Linear Light

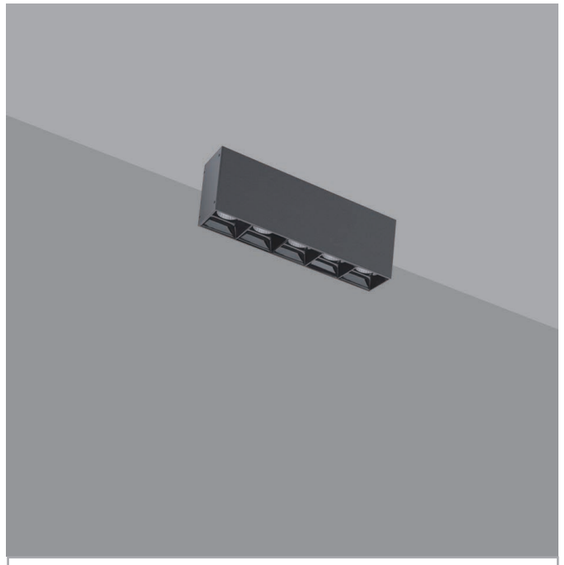



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83640710 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1200 lm

SLINE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83640710 - 15 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

SLINE LED Surface Linear Light

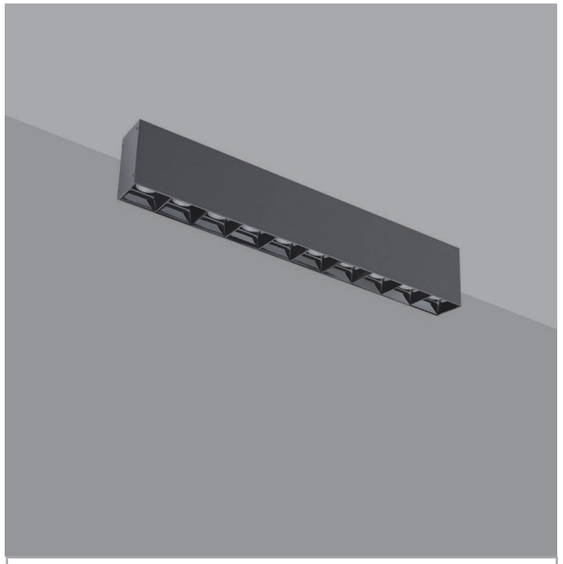



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83640711 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2400 lm

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

83640711 - 30 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.


SLINE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

* Lumen output is concerned with different CCT.

SLINE LED Surface Linear Light





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83640712 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3200 lm

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

83640712 - 40 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

SLINE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

* Lumen output is concerned with different CCT.


VISION LED

Recessed Downlight



VISION LED Slim Trim Round Recessed Downlight






IP20 CE F 3 SDCM

50,000hrs（Ta=25° C）
COB LED

VISION LED Slim Trim Round Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

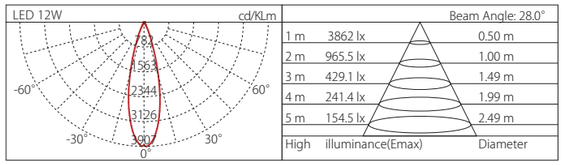

		Beam Angle: 28.0°
1 m	3862 lx	0.50 m
2 m	965.5 lx	1.00 m
3 m	429.1 lx	1.49 m
4 m	241.4 lx	1.99 m
5 m	154.5 lx	2.49 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81001071 8W **81001072** 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 695 lm(8W) / 1090 lm(12W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81001071 - 8 - 90 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

VISION LED Slim Trim Round Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81001073 8W 81001074 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 695 lm(8W) / 1090 lm(12W)

VISION LED Slim Trim Round Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Tilt ±25 °.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81001073 - 8 - 90 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

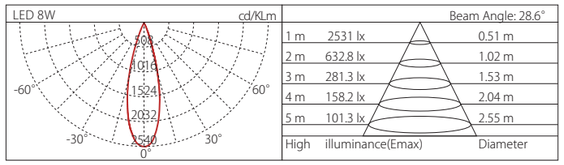

* IES files of different beam angle are available upon request.

VISION LED Slim Trim Round Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032580 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 160 lm

VISION downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable angle: ±30°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D

15° 24°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81032580 - 7 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

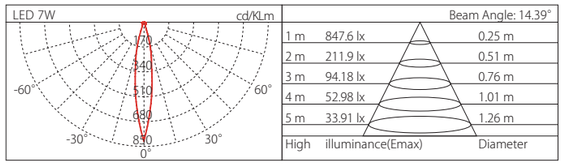


* IES files of different beam angle are available upon request.



The Anandi Hotel and Spa

VISION LED Slim Trim Round Recessed Downlight



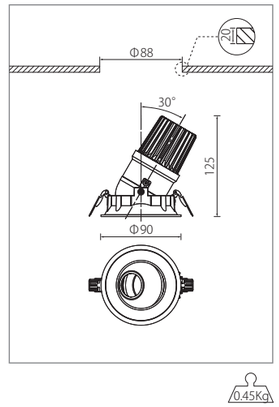


50,000hrs（Ta=25° C）
COB LED

81032560 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 160 lm

VISION downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…


Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable angle: ±30°.
Easy for installation and maintenance.

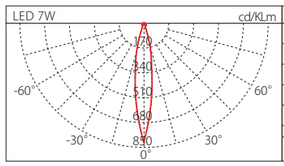

* IES files of different beam angle are available upon request.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D



Finish

WH - white
BK - black
GR - grey



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81032560 - 7 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81001081 8W 81001082 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 689 lm(8W) / 1084 lm(12W)

VISION LED Slim Trim Square Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Fixed.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81001081 - 8 - 90 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

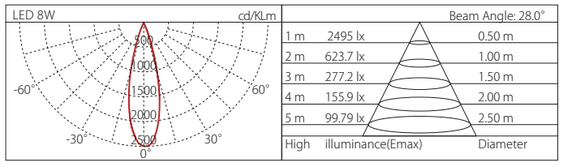


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81001083 8W 81001084 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 689 lm(8W) / 1084 lm(12W)

VISION LED Slim Trim Square Recessed Downlight is with slim trim and elegant design, easy for installation. Have excellent control of glare light. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoating finish.
Led driver is connected externally.
Tilt ±25 °.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
36 - 36D

15° 24° 36°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81001083 - 8 - 90 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

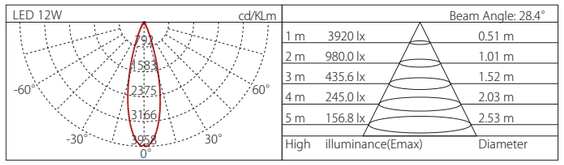


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT. www.recolighting.com



VISION LED Slim Trim Square Recessed Downlight




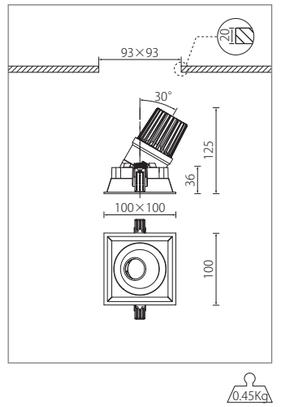

50,000hrs（Ta=25°C）
COB LED

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. Multi-functional for either horizontal or vertical adjustable. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 30°.
Easy for installation and maintenance.

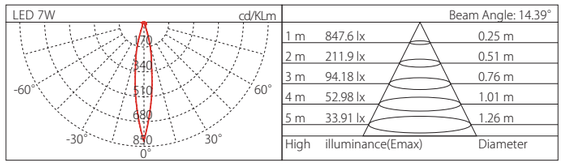


* IES files of different beam angle are available upon request.

81052928 7W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 160 lm


CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D



Finish

WH - white
BK - black
GR - grey



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81052928 - 7 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

VISION LED Slim Trim Square Recessed Downlight



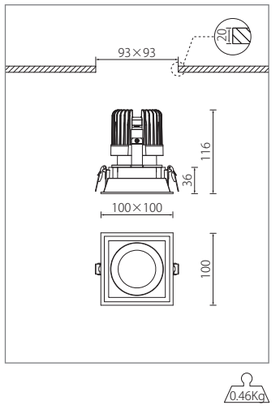

IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81053438 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 620 lm

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

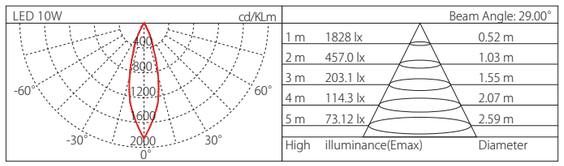

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K
Warm White 3000K
Neutral White 4000K
Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
35 - 35D

15° 24° 35°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81053438 - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

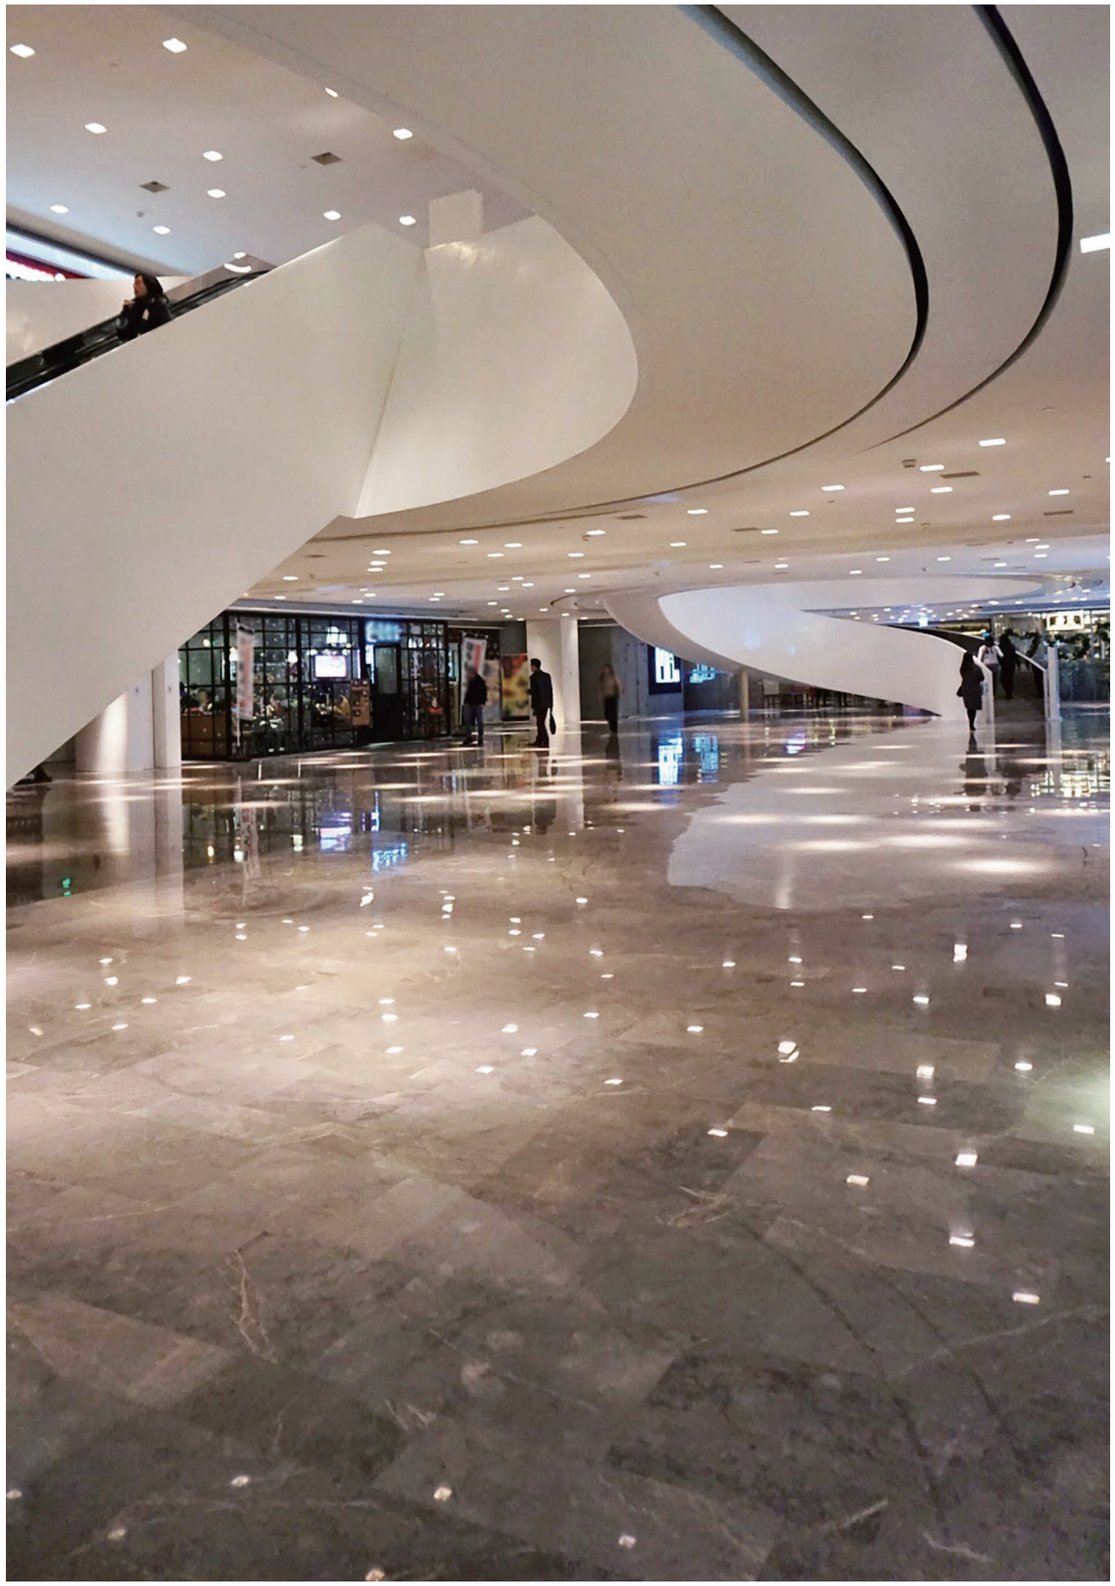

VISION LED Slim Trim Square Recessed Downlight



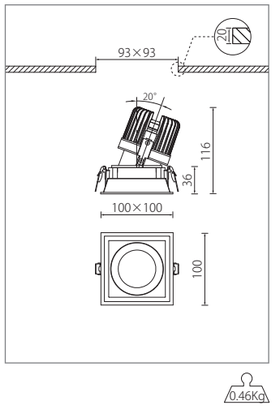

IP20 3 SDCM


69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

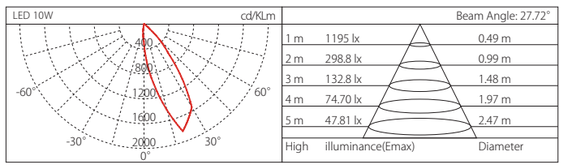

* IES files of different beam angle are available upon request.

81053558 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 590 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
35 - 35D

15° 24° 35°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81053558 - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

VISION LED Slim Trim Square Recessed Downlight



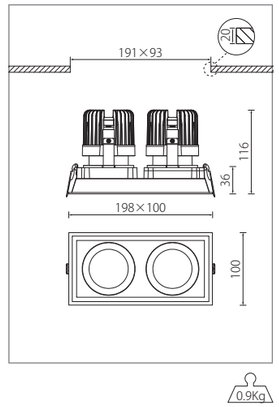


IP20 3 SDCM

50,000hrs（Ta=25°C）

COB LED

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

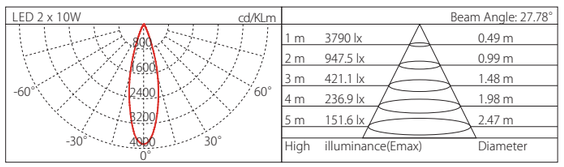

* IES files of different beam angle are available upon request.

81053708 2×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×590 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
35 - 35D

15° 24° 35°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81053708 - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

VISION LED Slim Trim Square Recessed Downlight



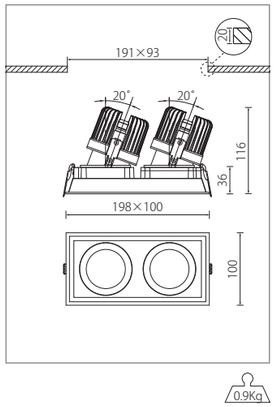


IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 30°.
Easy for installation and maintenance

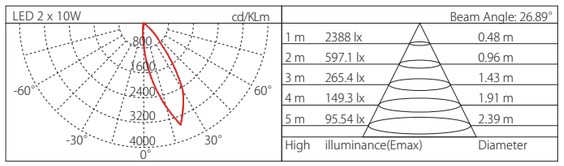

* IES files of different beam angle are available upon request.

81053818 2×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×590 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
35 - 35D

15° 24° 35°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81053818 - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

VISION LED Slim Trim Square Recessed Downlight



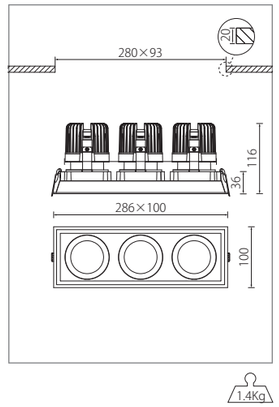


IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Easy for installation and maintenance.

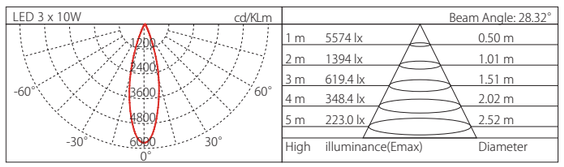

* IES files of different beam angle are available upon request.

81053938 3×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×590 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
35 - 35D

15° 24° 35°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81053938 - 30 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

VISION LED Slim Trim Square Recessed Downlight



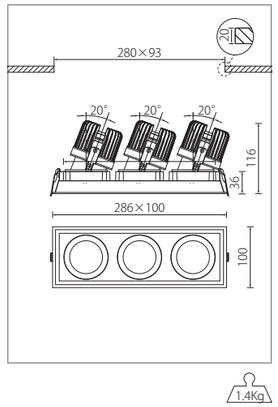

IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81054048 3×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×590 lm

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Rotate 355° and tilt 30°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
35 - 35D

15° 24° 35°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81054048 - 30 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

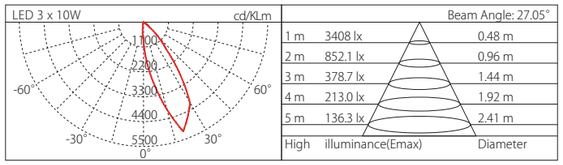

* IES files of different beam angle are available upon request.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81012738 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 600 lm

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012738 - 10 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

Accessories

F - Honeycomb

Honeycomb

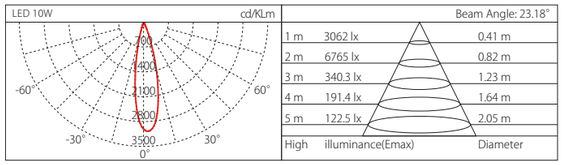


* IES files of different beam angle are available upon request.



VISION LED Slim Trim Square Recessed Downlight






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

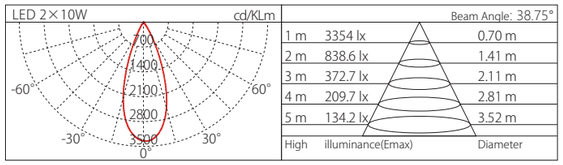

Beam Angle: 38.75°

1 m	3354 lx	0.70 m
2 m	838.6 lx	1.41 m
3 m	372.7 lx	2.11 m
4 m	209.7 lx	2.81 m
5 m	134.2 lx	3.52 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

81012778 2×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1200 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81012778 - 20 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

Accessories


F - Honeycomb



* Lumen output is concerned with different CCT.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012820 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 720 lm

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012820 - 12 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

Accessories

F - Honeycomb

Honeycomb

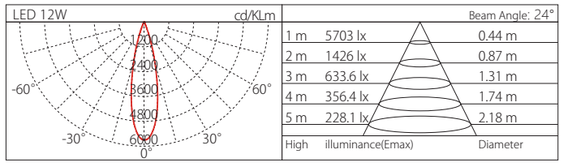


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012840 2×12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1440 lm

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012840 - 24 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

Accessories

F - Honeycomb

Honeycomb

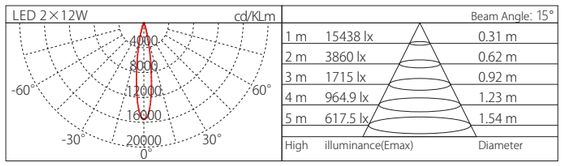


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012210 3×12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2160 lm

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012210 - 36 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81054938 26W 81055418 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1750 lm(26W) / 2100 lm(30W)

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

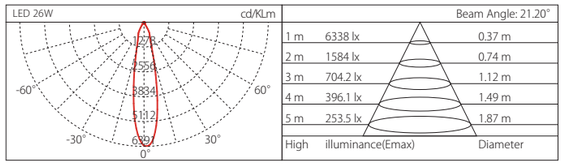

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81054938 - 26 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT. www.recolighting.com

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81054938.D 2×25W
81055418.D 2×30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×1750 lm(2×25W) / 2×2100 lm(2×30W)

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
CT 2700-6500K

Beam
15 - 15D
24 - 24D
40 - 40D


15° 24° 40°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

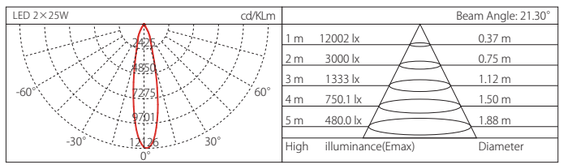


* IES files of different beam angle are available upon request.

Ordering code sample:
81055418.D - 60 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

VISION LED Slim Trim Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81054938.T 3×25W
81055418.T 3×30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×1750 lm(3×25W) / 3×2100 lm(3×30W)

VISION LED downlight is with slim trim, compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT
27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam
15 - 15D
24 - 24D
40 - 40D


15° 24° 40°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

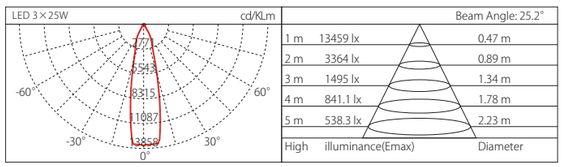

* IES files of different beam angle are available upon request.

Ordering code sample:
81054938.T - 75 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.




Square Recessed Trim Downlight

FRAME



FRAME LED Square Recessed Downlight





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81032878 8W **81012298** 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 640 lm(8W) / 800 lm(10W)

FRAME is a square recessed downlight, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Powdercoated finish.
High transparency optic lens, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

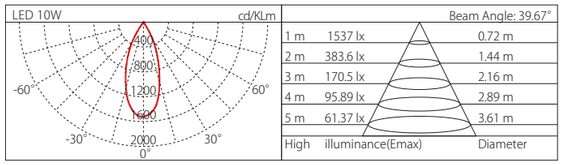

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81032878 - 8 - 90 - 27 - 15 - WH - D1

For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

FRAME LED Square Recessed Downlight






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

FRAME is a square recessed downlight, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Powdercoated finish.
High transparency optic lens, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

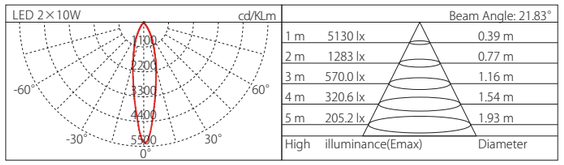

* IES files of different beam angle are available upon request.

81032390 2×8W
81012358 2×10W
Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×640 lm(2×8W) / 2×800 lm(2×10W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81032390 - 16 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.


* Lumen output is concerned with different CCT.



Nanjing Fairmont

FRAME LED Square Recessed Downlight






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

FRAME is a square recessed downlight, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Powdercoated finish.
High transparency optic lens, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

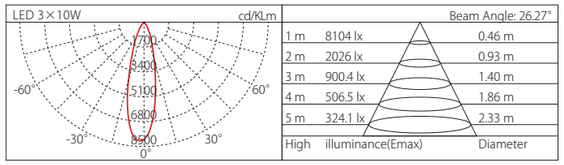

* IES files of different beam angle are available upon request.

81032878.T 3×8W
81053948 3×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×640 lm(3×8W) / 3×800 lm(3×10W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K
Warm White 3000K
Neutral White 4000K
Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81032878.T - 24 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

FRAME LED Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012800 20W **81033328** 26W
81032108 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm (20W) / 1750 lm(26W) / 2100 lm(30W)

FRAME is a square recessed downlight, compact and elegant design, easy for installation. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
latest new COB technology.
Adjustable angle: ±20°.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81012800 - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

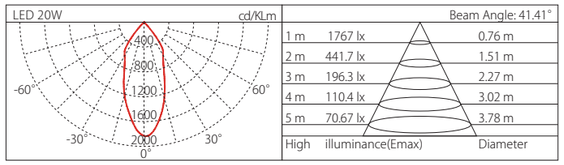

* IES files of different beam angle are available upon request.

FRAME LED Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012860 2×20W
81033328.D 2×26W
81032108.D 2×30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×1400 lm(2×20W) / 2×1750 lm(2×26W) / 2×2100 lm(2×30W)

FRAME is a square recessed downlight, compact and elegant design, easy for installation. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
latest new COB technology.
Adjustable angle: ±20°.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012860 - 40 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

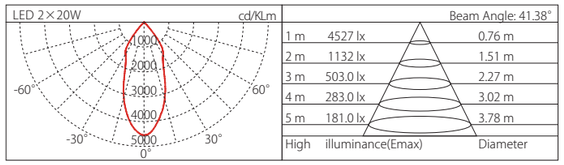


* IES files of different beam angle are available upon request.

Shanghai Mint Office Building

FRAME LED Square Recessed Downlight






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

FRAME is a square recessed downlight, compact and elegant design, easy for installation. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
latest new COB technology.
Adjustable angle: ±20°.

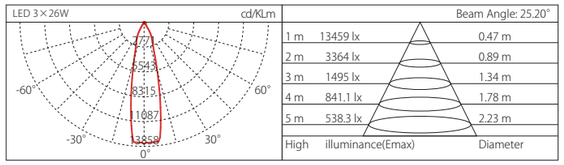

* IES files of different beam angle are available upon request.

81012800.T 3×20W
81033328.T 3×26W
81032108.T 3×30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×1400 lm(3×20W) / 3×1750 lm(3×26W) / 3×2100 lm(3×30W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012800.T - 60 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

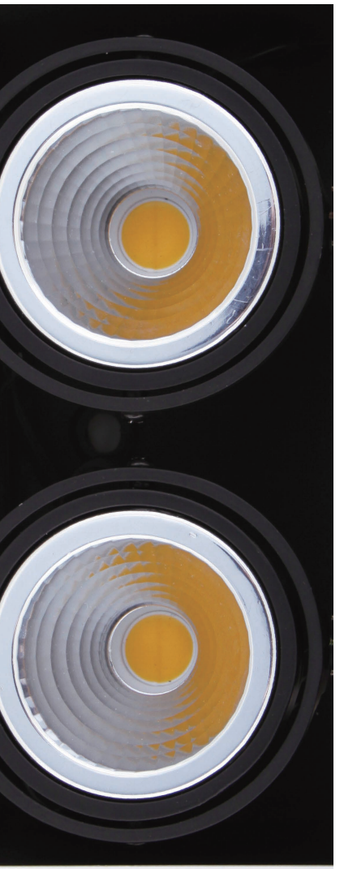



Square Recessed Trimless Downlight

FLUSH



FLUSH LED Trimless Square Recessed Downlight

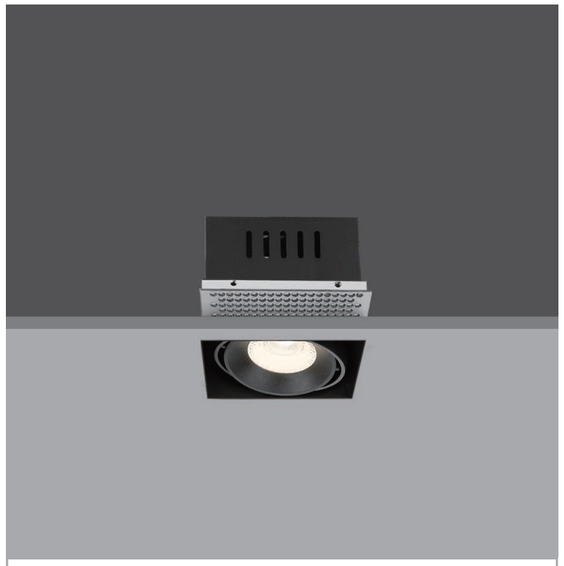



IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81014008 8W **81032980** 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 640 lm(8W) / 800 lm(10W)

FLUSH is a square recessed downlight with trimless structure, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Trimless design, Powdercoated finish.
High transparency optic lens, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

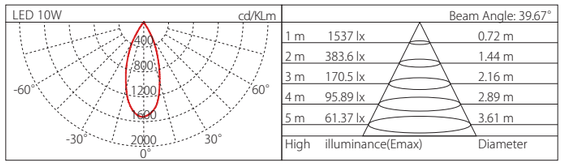

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

81014008 - 8 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81053878 2×8W
81012108 2×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×640 lm(2×8W) / 2×800 lm(2×10W)

FLUSH is a square recessed downlight with trimless structure, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Trimless design, Powdercoated finish.
High transparency optic lens, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81053878 - 16 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

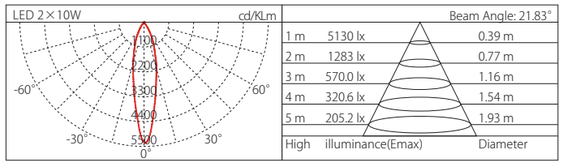

* IES files of different beam angle are available upon request.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

81014008.T 3×8W
81032988.T 3×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×640 lm(3×8W) / 3×800 lm(3×10W)

FLUSH is a square recessed downlight with trimless structure, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Trimless design, Powdercoated finish.
High transparency optic lens, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81014008.T - 24 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

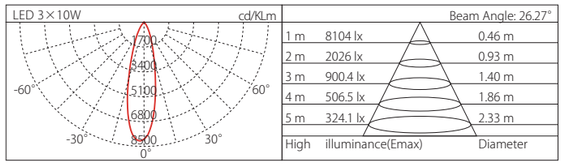

* IES files of different beam angle are available upon request.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81032408 20W **81013338** 26W
81033340 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm (20W) / 1750 lm(26W) / 2100 lm(30W)

FLUSH is a square recessed downlight with trimless structure, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Trimless design, Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K
TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81032408 - 20 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

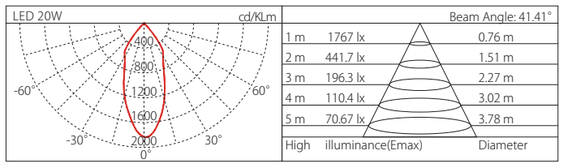


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

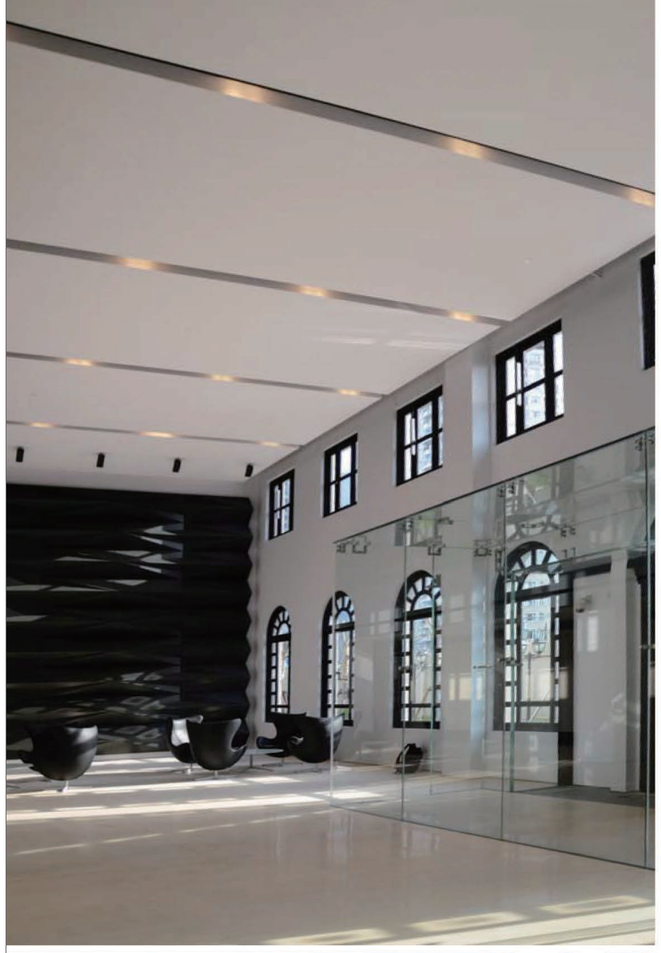




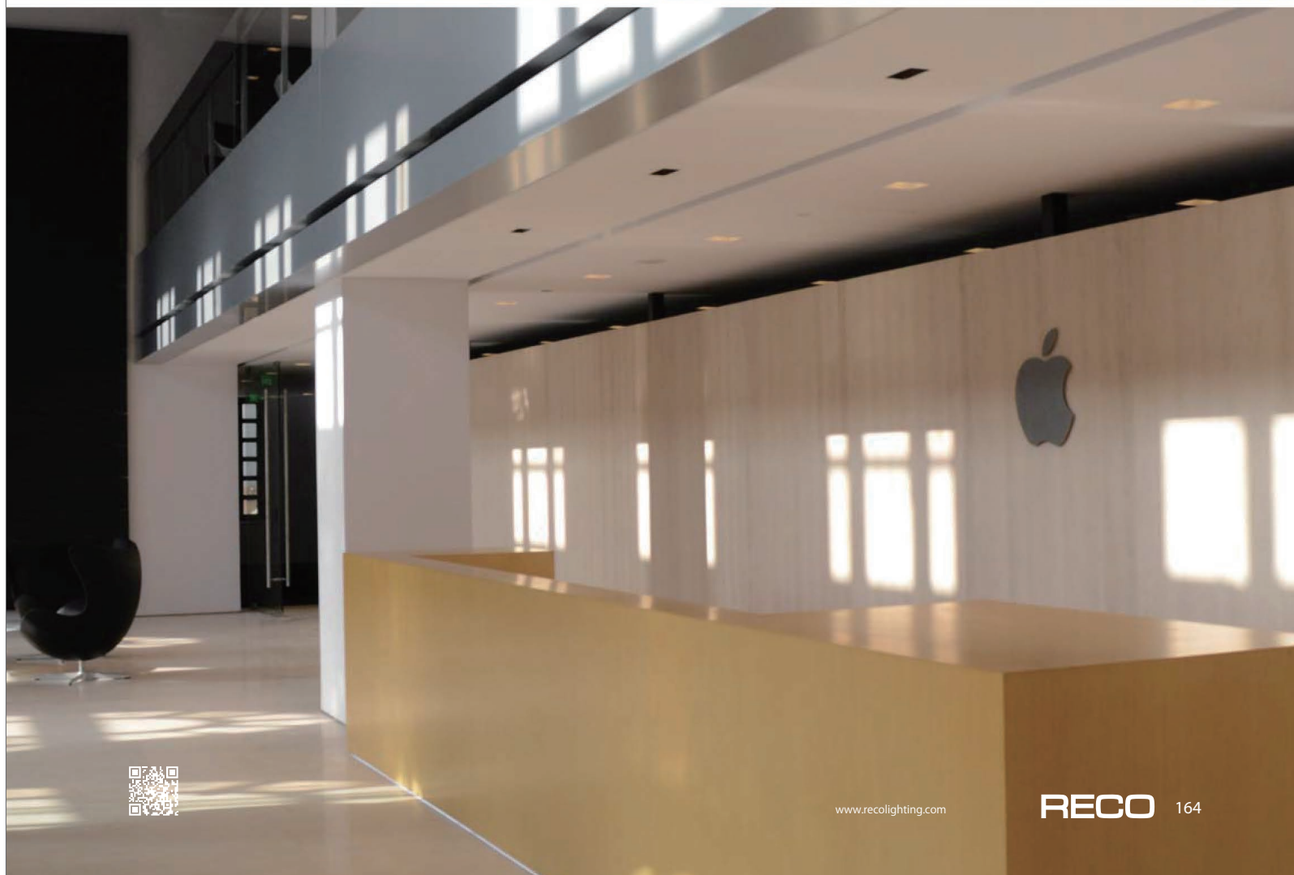

FLUSH LED Trimless Square Recessed Downlight






IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

FLUSH is a square recessed downlight with trimless structure, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Trimless design, Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

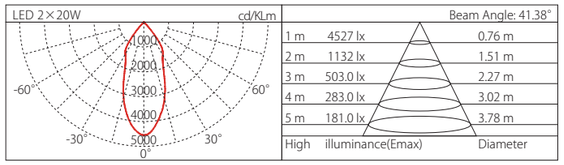

* IES files of different beam angle are available upon request.

81012850 2×20W
81033338.D 2×26W
81033340.D 2×30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×1400 lm(2×20W) / 2×1750 lm(2×26W) / 2×2100 lm(2×30W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81012850 - 40 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

FLUSH LED Trimless Square Recessed Downlight






IP20 3 SDCM

50,000hrs（Ta=25°C）
COB LED

FLUSH is a square recessed downlight with trimless structure, compact and elegant design, easy for installation. Using lastest LED technology. It's suitable for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Steel housing and Die-casting aluminium heat dissipation part.
Trimless design, Powdercoated finish.
High purity anodized aluminium reflector, minimized glare light efficiently.
Driver is connected externally.
Adjustable angle: ±20°.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.

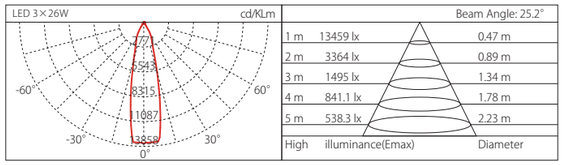

* IES files of different beam angle are available upon request.

81032408.T 3×20W
81033338.T 3×26W
81033340.T 3×30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×1400 lm(3×20W) / 3×1750 lm(3×26W) / 3×2100 lm(3×30W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

81032408.T - 60 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012268 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 600 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel,high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam


15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

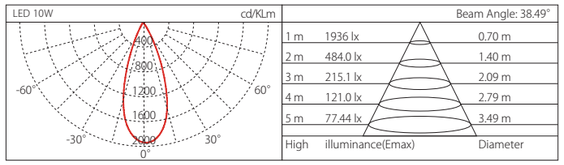

* IES files of different beam angle are available upon request.

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012268 - 10 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.


Accessories

F - Honeycomb

Honeycomb

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012938 2×10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1200 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel,high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam


15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

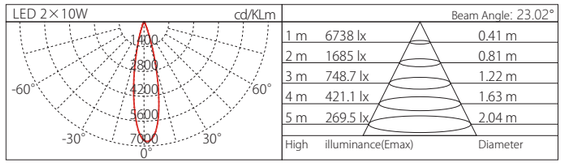

* IES files of different beam angle are available upon request.

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012938 - 20 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.


Accessories

F - Honeycomb

Honeycomb

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012810 12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 720 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012810 - 12 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

Accessories

F - Honeycomb

Honeycomb

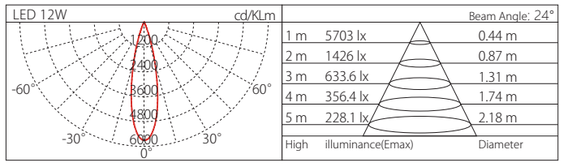


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012830 2×12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1440 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

81012830 - 24 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

Accessories

F - Honeycomb

Honeycomb

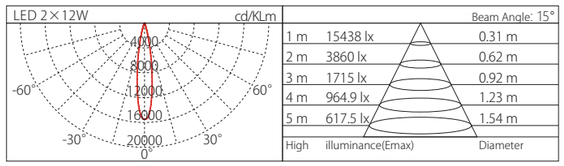


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012200 3×12W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2160 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81012200 - 36 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.


Accessories


F - Honeycomb

Honeycomb

* Lumen output is concerned with different CCT.

FLUSH LED Trimless Square Recessed Downlight

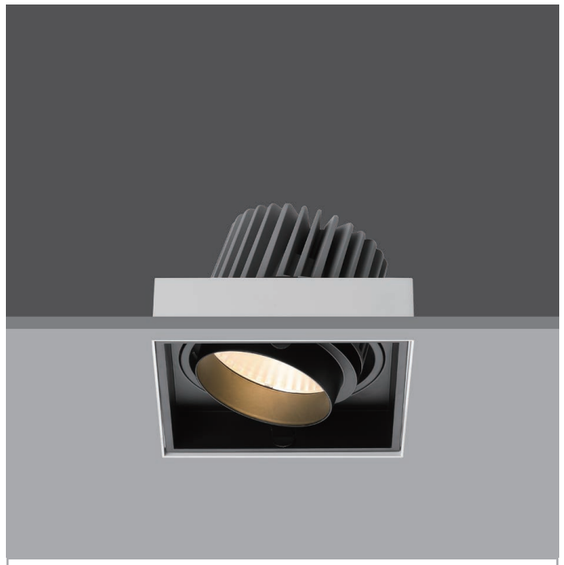



IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

81012250 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2100 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

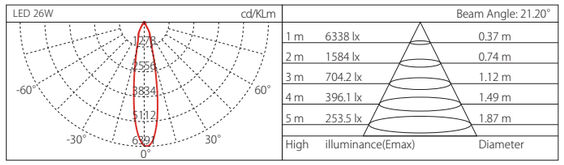

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable


Ordering code sample:

81012250 - 30 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

FLUSH LED Trimless Square Recessed Downlight

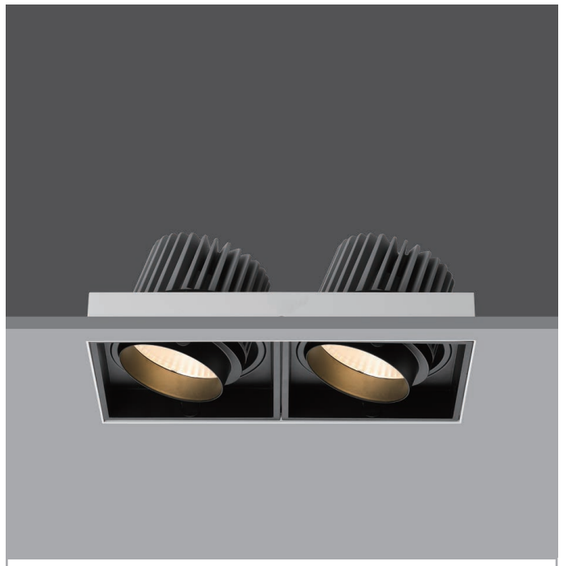



IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012240 2×30W


Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2×2100 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


81012240 - 60 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

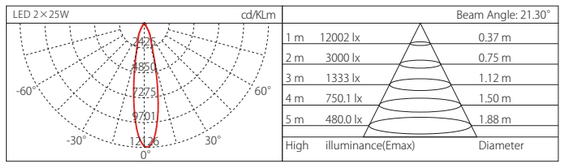

* IES files of different beam angle are available upon request.

FLUSH LED Trimless Square Recessed Downlight





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81012260 3×30W


Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3×2100 lm

FLUSH LED trimless downlight is with compact and elegant design, easy for installation. It's widely suitable for commercial and residential spaces as accent lighting, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Die-casting aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Adjustable: Rotate 355°and tilt 0-20°.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Beam

15 - 15D
24 - 24D
40 - 40D



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81012260 - 90 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

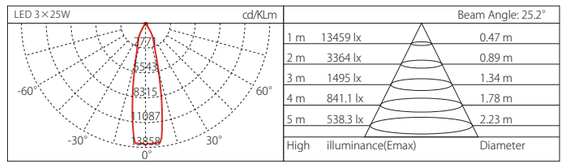


* IES files of different beam angle are available upon request.




NIPPLE

Surface Downlight

NIPPLE LED Surface Downlight

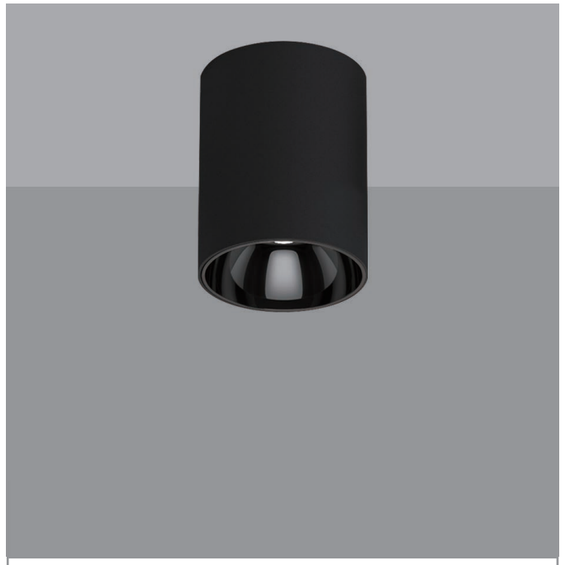



IP20 3 SDCM


69° Glare comfort cut off angle

50,000hrs（Ta=25° C）

COB LED

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.

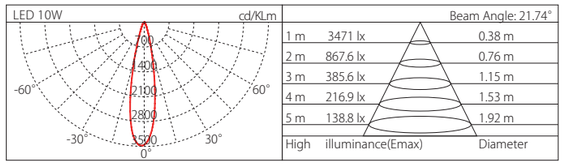


* IES files of different beam angle are available upon request.

83610070 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 682 lm


CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

20 - 20D
40 - 40D
60 - 60D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:

83610070 - 10 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

NIPPLE LED Surface Downlight





IP20 3 SDCM


69° Glare comfort cut off angle

50,000hrs（Ta=25° C）

COB LED

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.

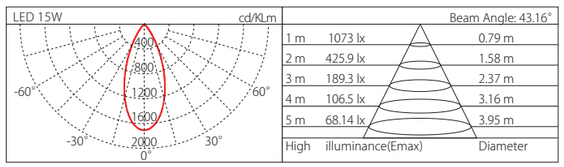

* IES files of different beam angle are available upon request.

83610080 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 955 lm


CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

20 - 20D
40 - 40D
60 - 60D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white



Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


83610080 - 15 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information, please see page 232.



* Lumen output is concerned with different CCT.

NIPPLE LED Surface Downlight





IP20 3 SDCM

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

83610090 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 666 lm

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

20 - 20D
40 - 40D
60 - 60D

20° 40° 60°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


83610090 - 10 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information,
please see page 232.

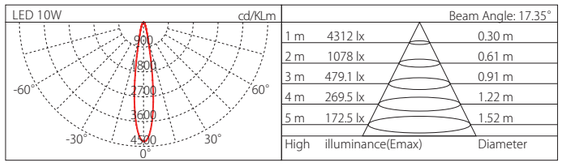

* IES files of different beam angle are available upon request.

NIPPLE LED Surface Downlight





IP20 3 SDCM

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

83610100 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 948 lm

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

20 - 20D
40 - 40D
60 - 60D

20° 40° 60°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


83610100 - 15 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information,
please see page 232.

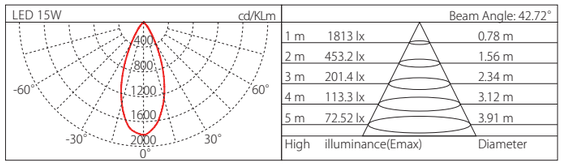

* IES files of different beam angle are available upon request.

NIPPLE LED Surface Downlight





IP20 3 SDCM

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

83610110 20W 83610120 25W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1329 lm(20W) / 1534 lm(25W)

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

20 - 20D
40 - 40D
60 - 60D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


83610110 - 20 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information, please see page 232.

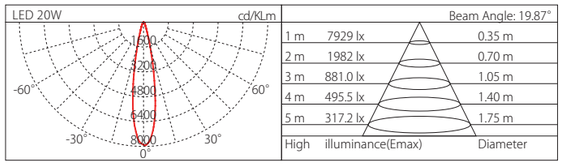

* IES files of different beam angle are available upon request.

NIPPLE LED Surface Downlight





IP20 3 SDCM

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

83610130 30W 83610150 35W 83610160 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2025 lm (30W) / 2216 lm(35W) / 2439 lm(40W)

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95




CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K



Beam

20 - 20D
40 - 40D
60 - 60D



Finish

WH - white
BK - black
GR - grey



Reflector

DL - darklight
ST - satin
MB - mat black
MW - mat white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:


83610130 - 30 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information, please see page 232.

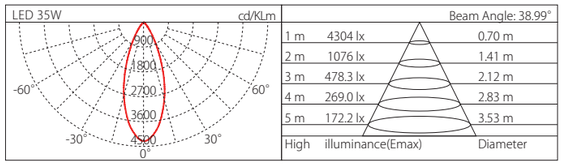

* IES files of different beam angle are available upon request.

NIPPLE LED Surface Downlight





IP20 3 SDCM

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

83610170 40W **83610180** 45W **83610190** 50W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2732 lm (40W) / 3019 lm(45W) / 3355 lm(50W)

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

20 - 20D
40 - 40D
60 - 60D

20° 40° 60°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector


DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

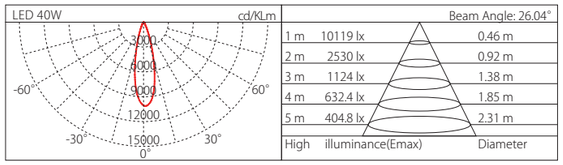


* IES files of different beam angle are available upon request.

Ordering code sample:

83610170 - 40 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information, please see page 232.

NIPPLE LED Surface Downlight





IP20 3 SDCM

69° Glare comfort cut off angle

50,000hrs（Ta=25°C）

COB LED

83610200 50W **83610210** 60W **83610220** 70W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3550 lm (50W) / 4386 lm(60W) / 4970 lm(70W)

NIPPLE LED surface downlight is with fashionable and elegant design, using latest new LED technology. It's widely used for shopping mall, lobby, corridor, exhibition & display area and etc…

Die-casting aluminium housing.
Powdercoated finish.
High efficiency optic.
Built-in LED driver.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K
TW - 2700-6500K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K | TW 2700-6500K

Beam

20 - 20D
40 - 40D
60 - 60D

20° 40° 60°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Reflector


DL - darklight
ST - satin
MB - mat black
MW - mat white

darklight satin mat black mat white

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

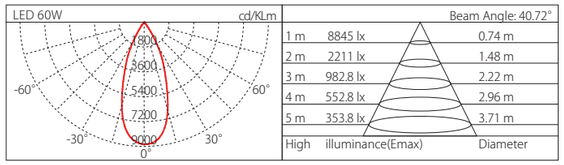

* IES files of different beam angle are available upon request.

Ordering code sample:


83610200 - 50 - 90 - 27 - 20 - WH - DL - D1
For complete code ordering information, please see page 232.



TINI


Track Light



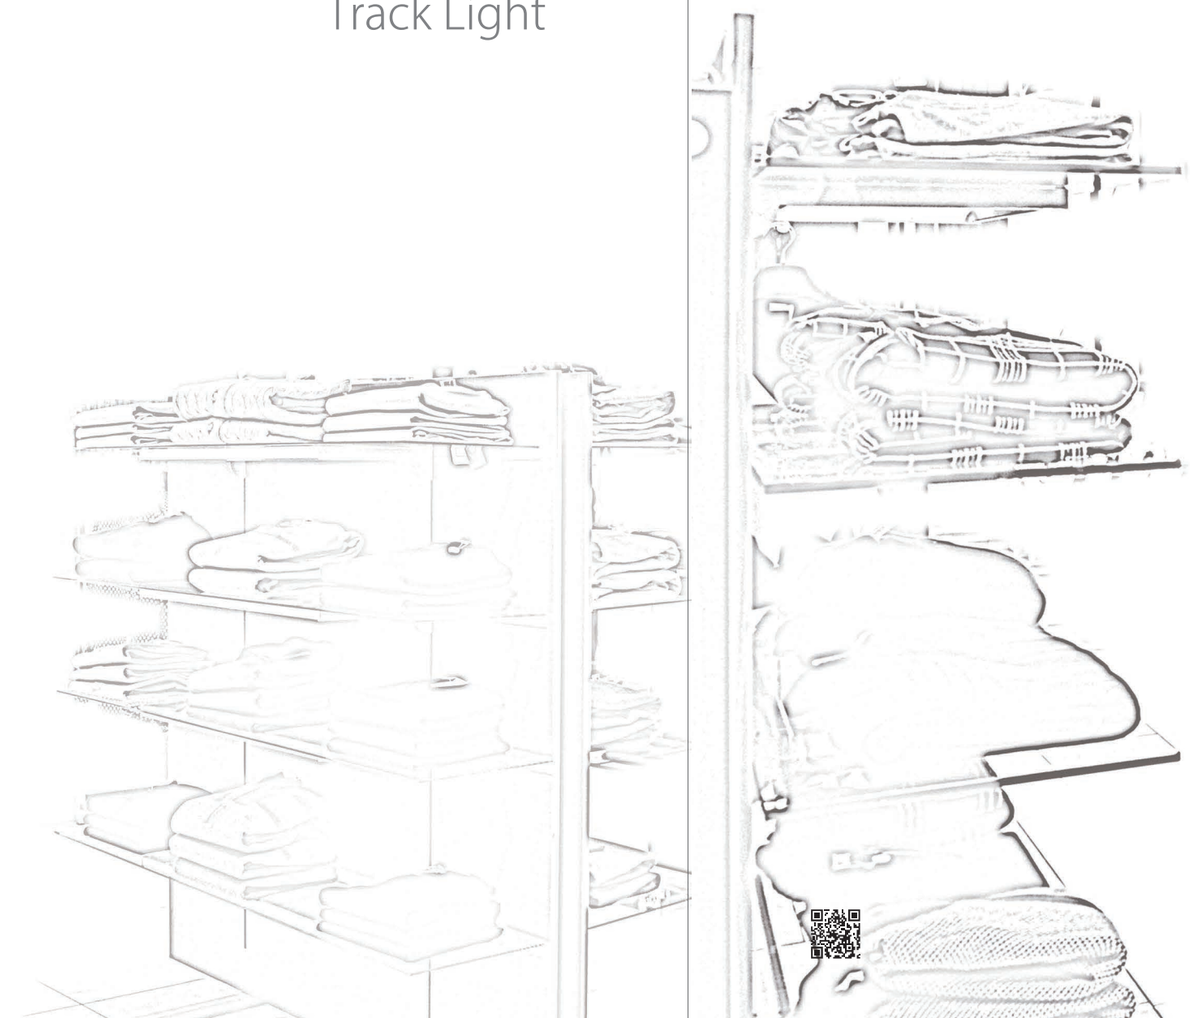




RECO track for 3-phase installation



1 Phase 1
2 Phase 2
3 Phase 3
N Neutral
PE Protective conductor

RECO track for DALI installation




DALL DALI data line
DALL DALI data line
1 Phase
N Neutral
PE Protective conductor

RECO 3-circuit track is available in lengths up to 3M,
When connected to a three-phase net work,
each of the three circuits can be loaded to
a maximum of 16A.
Each copper conductors are separately
protected by isolation materials,
to avoid the interfering from each other.
The lamps mounted on each track shall
not exceed its rated load.

3-circuit surface track





1M track actual one meter
12301678(BK)
12301679(WH)
NW: 0.89Kg




2M track actual one meter
12301676(BK)
12301677(WH)
NW: 1.75Kg




3M track actual one meter
12301674(BK)
12301675(WH)
NW: 2.64Kg



3-circuit recessed track





1M recessed track actual one meter
12301721(BK)
12301720(WH)
NW: 0.97Kg



2M recessed track actual one meter
12301723(BK)
12301722(WH)
NW: 1.9Kg



3M recessed track actual one meter
12301725(BK)
12301724(WH)
NW: 2.85Kg



Track accessories




Live-end connector to start a run

11801510(BK)
11801511(WH)




"L" connector to connect two track sections at a 90 angle.

11801512(BK)
11801513(WH)



"T" connector to connect three track sections into a T configuration.

11801514(BK)
11801515(WH)



"X" connector to connect four track sections into a cross configuration.

11801516(BK)
11801517(WH)




Straight connector to connect two track sections end-to-end.
It provides a center feed option.

11801518(BK)
11801519(WH)



Mini joiner A low profile connector to join two straight track sections end-to-end

11802160(BK)
11802161(WH)




Flexible connector to connect two track sections at any angle up to 90 or wall to ceiling or pitched ceiling applications.

11802162(BK)
11802163(WH)




End cap connects to the track section end.

12301050(BK)
12301051(WH)




Suspension kit.

11802164(BK)
11802165(WH)



Suspension kit with 6mm x 1m rod.

11802166(BK)
11802167(WH)




Suspension kit with 1.5m wire.

11802168(BK)
11802169(WH)

TINI LED Recessed Spot Light





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81018948 10W **81018958** 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 700 lm(10W) / 1050 lm(15W)

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare control, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High transparency lens optic, minimized glare light efficiently.
Built-in driver.
Recessed mounted.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81018948 - 10 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

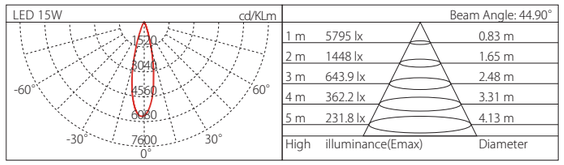

		Beam Angle: 44.90°
1 m	5795 lx	0.83 m
2 m	1448 lx	1.65 m
3 m	643.9 lx	2.48 m
4 m	362.2 lx	3.31 m
5 m	231.8 lx	4.13 m
High	illuminance(Emax)	Diameter


* IES files of different beam angle are available upon request.



Textile Museum of Donghua University

TINI LED Recessed Spot Light





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81018870 26W 81018838 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1750 lm(26W) / 2100 lm(30W)

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare control, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High transparency lens optic, minimized glare light efficiently.
Built-in driver.
Recessed mounted.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

81018870 - 26 - 80 - 27 - 15 - WH - D0
For complete code ordering information, please see page 232.

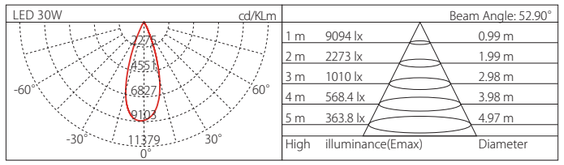


* IES files of different beam angle are available upon request.



Textile Museum of Donghua University

TINI LED Surface Spot Light





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

82000018 10W **82018958** 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 700 lm(10W) / 1050 lm(15W)

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare con trol, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High transparency lens optic, minimized glare light efficiently.
Built-in driver.
Surface mounted.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish


WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

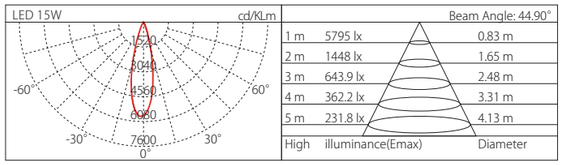


* IES files of different beam angle are available upon request.

Ordering code sample:

82000018 - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

TINI LED Surface Spot Light





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

82018870 26W **82018838** 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1750 lm(26W) / 2100 lm(30W)

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare con trol, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High transparency lens optic, minimized glare light efficiently.
Built-in driver.
Surface mounted.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam


15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

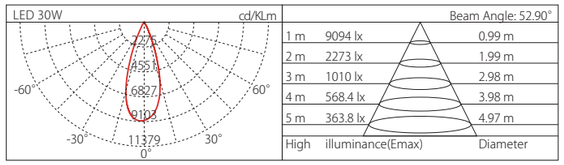

* IES files of different beam angle are available upon request.

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

82018870 - 26 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

TINI LED Track Light





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

82000058 10W **82000068** 15W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 700 lm(10W) / 1050 lm(15W)

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare con trol, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High transparency lens optic, minimized glare light efficiently.
Built-in driver.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

82000058 - 10 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

LED 15W cd/KLm



Beam Angle: 44.90°

1 m	2155 lx	0.83 m
2 m	538.9 lx	1.65 m
3 m	239.5 lx	2.48 m
4 m	134.7 lx	3.31 m
5 m	86.23 lx	4.13 m
High	illuminance(Emax)	Diameter


* IES files of different beam angle are available upon request.



* Lumen output is concerned with different CCT.

TINI LED Track Light






IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare con trol, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High transparency lens optic, minimized glare light efficiently.
Built-in driver.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.



		Beam Angle: 52.90°
1 m	9094 lx	0.99 m
2 m	2273 lx	1.99 m
3 m	1010 lx	2.98 m
4 m	568.4 lx	3.98 m
5 m	363.8 lx	4.97 m
High	illuminance(Emax)	Diameter

* IES files of different beam angle are available upon request.

82018890 26W 82018800 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1750 lm(26W) / 2100 lm(30W)

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


82018890 - 26 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

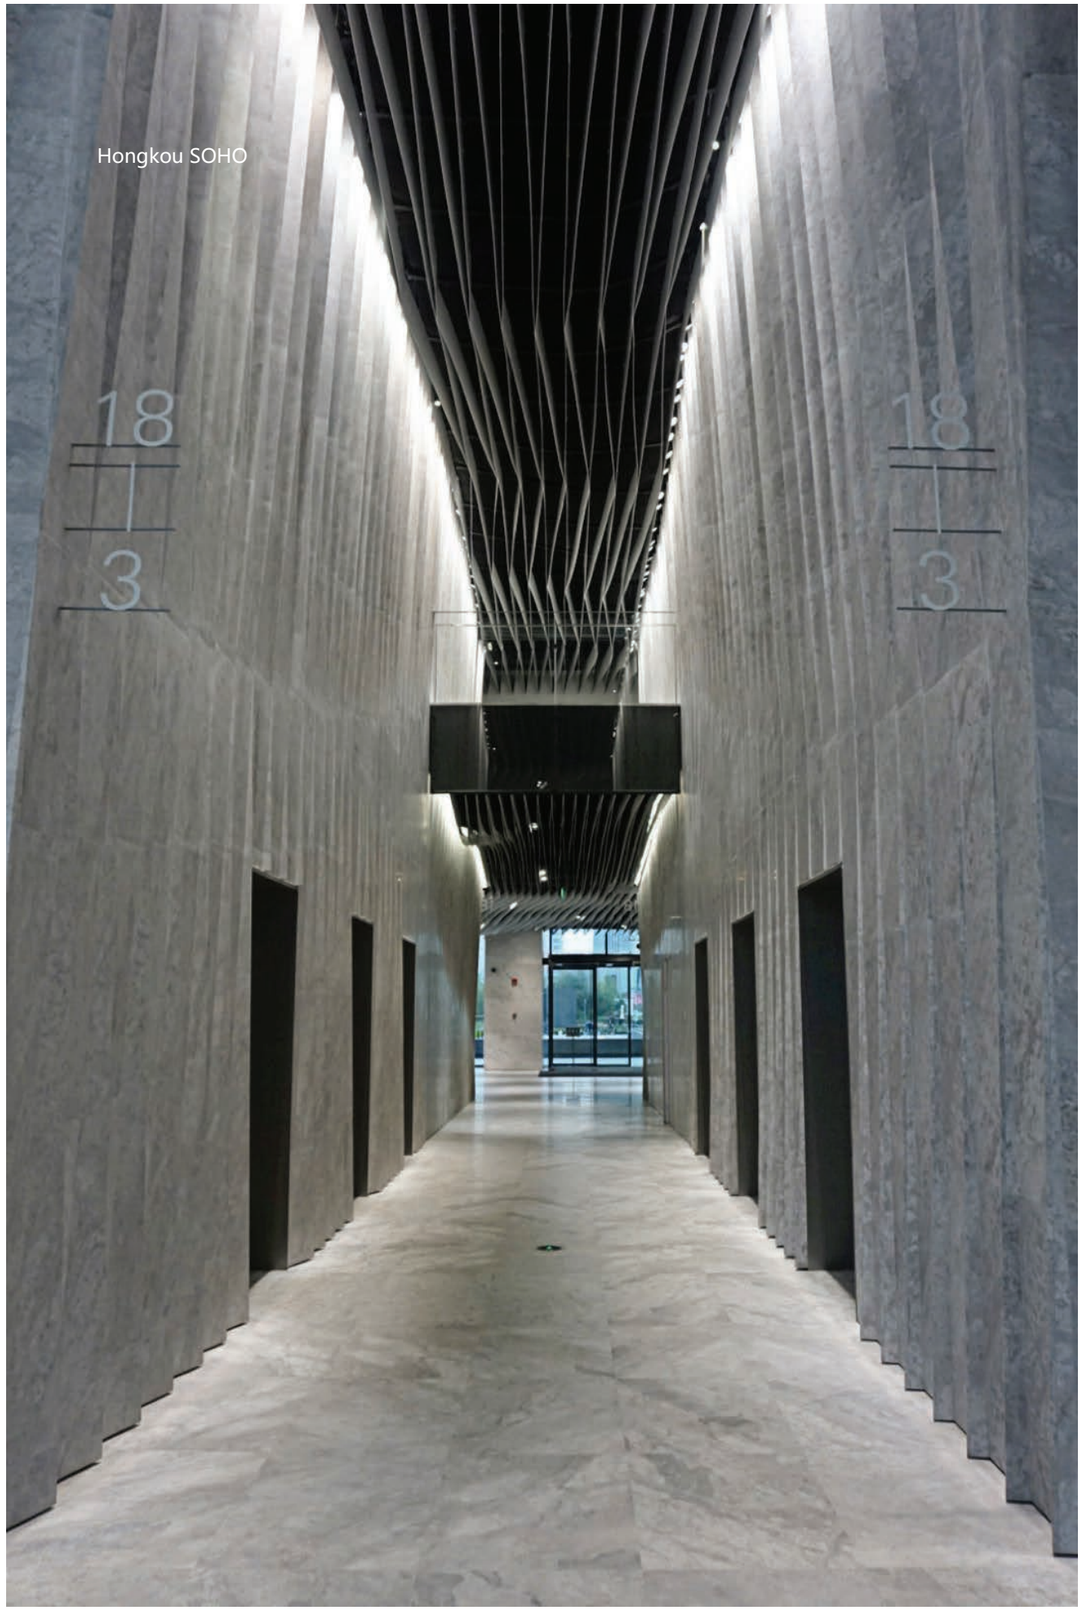

TINI LED Track Light





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

82018820 35W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2450 lm

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare con trol, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Built-in driver.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
24 - 24D
40 - 40D

15° 24° 40°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable


Ordering code sample:

82018820 - 35 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

TINI LED Track Light





IP20 3 SDCM


50,000hrs（Ta=25° C）
COB LED

82018908 15W 82018868 20W
82018860 26W 82018828 30W

Input Voltage:AC 220V~240V 50Hz/60Hz
Lumens:1350 lm (15W) / 1670 lm (20w) / 2080 lm(26W) / 2470 lm (30W)

Elegant and compact design, with high efficiency and color rendering, excellent anti-glare con trol, which can meet various of requirements for lighting solutions. It is widely applicable for shopping mall, cloth store, exhibition or display area and etc...

Die-casting aluminium housing.
Powdercoated finish.
High purity anodized reflector, minimized glare light efficiently.
Built-in driver.
Horizontally and vertically Adjustable.
Easy for installation and maintenance.

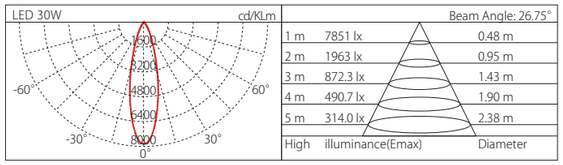

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

18 - 18D
24 - 24D
36 - 36D
45 - 45D

18° 24° 36° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

82018908 - 15 - 90 - 27 - 18 - WH - DL - D1
For complete code ordering information, please see page 232.


* Lumen output is concerned with different CCT.



PROFILE LED

Office Lighting





IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

86080000 18W 86080010 30W 86080020 45W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 900 lm(18W) / 1500 lm(30W) / 2250 lm(45W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare louvre attached, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With both micro prismatic diffuser and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
120 - 120D

120°


Finish
WH - white
BK - black
GR - grey


White | Black | Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
86080000 - 18 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

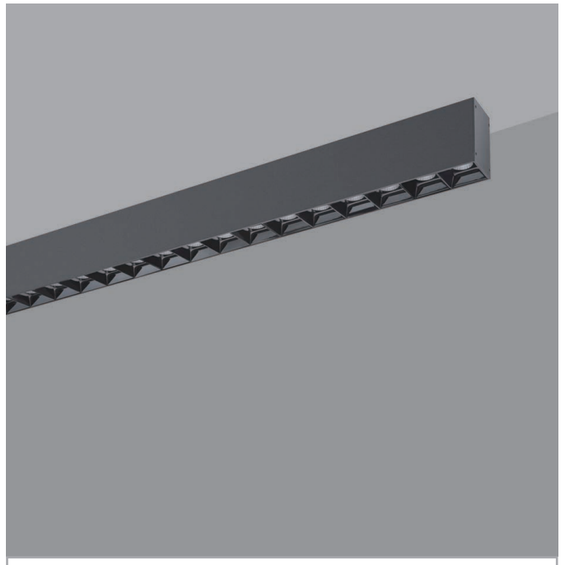



IP20 3 SDCM


40,000hrs（Ta=25°C）
SMD LED

86080100 24W 86080110 40W 86080120 60W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1900 lm(24W) / 3200 lm(40W) / 4800 lm(60W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

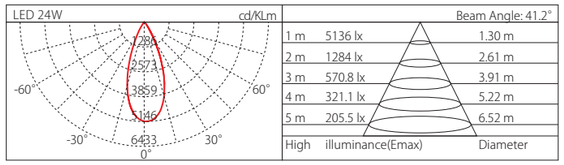

* IES files of different beam angle are available upon request.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish
WH - white
BK - black
GR - grey

White | Black | Grey


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
86080100 - 24 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

PROFILE LED Office Lighting





IP20 3 SDCM


40,000hrs（Ta=25° C）
SMD LED

86080200 24W **86080210** 40W
86080220 60W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1900 lm(24W) / 3200 lm(40W) / 4800 lm(60W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

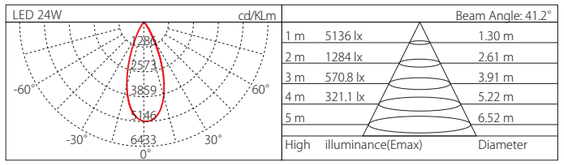

* IES files of different beam angle are available upon request.

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

86080200 - 24 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

PROFILE LED Office Lighting





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

86080230 24W **86080250** 40W
86080260 60W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1680 lm(24W) / 2800 lm(40W)/ 4200 lm(60W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With both PC diffuser and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

15+120 - 15D+120D
30+120 - 30D+120D
45+120 - 45D+120D

15°+120° 30°+120° 45°+120°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

86080230 - 24 - 90 - 27 - 15+120 - WH - D1
For complete code ordering information, please see page 232.

PROFILE LED Office Lighting





IP20  3 SDCM

40,000hrs（Ta=25° C）
SMD LED

86080270 24W **86080280** 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1680 lm(24W) / 2800 lm(40W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It is widely suitable for office and commercial spaces, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With opal PC diffuser.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Beam

120 - 120D

Finish


WH - white
BK - black
GR - grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Ordering code sample:


86080270 - 24 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

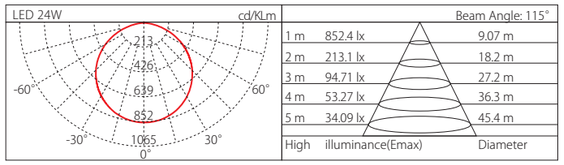


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

PROFILE LED Office Lighting

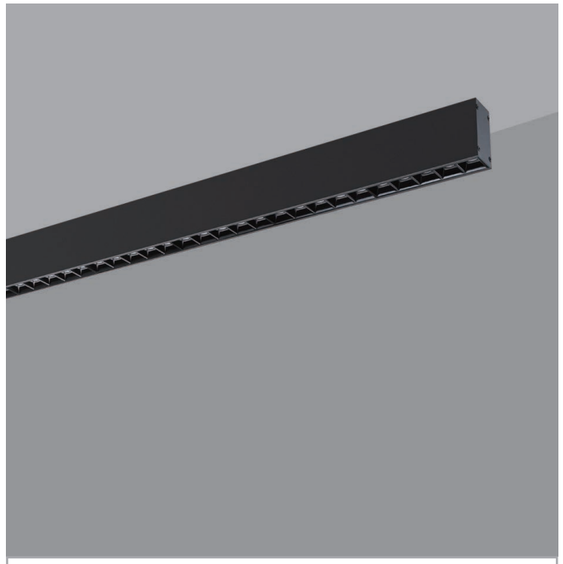



IP20  3 SDCM

40,000hrs（Ta=25° C）
SMD LED

86080300 24W **86080310** 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1900 lm(24W) / 3200 lm(40W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90

Ra80 Ra90

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Beam

15 - 15D
30 - 30D
45 - 45D

Finish

WH - white
BK - black
GR - grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Ordering code sample:

86080300 - 24 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.



* Lumen output is concerned with different CCT.





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

86080320 24W 86080330 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1680 lm(24W) / 2800 lm(40W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With both PC diffuser and high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
15+120 - 15D+120D
30+120 - 30D+120D
45+120 - 45D+120D

15°+120° 30°+120° 45°+120°

Finish
WH - white
BK - black
GR - grey

White Black Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:
86080320 - 24 - 90 - 27 - 15+120 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

PROFILE LED Office Lighting





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

86080350 16W 86080360 24W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 800 lm(16W) / 1200 lm(24W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It is widely suitable for office and commercial spaces, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With opal PC diffuser.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
120 - 120D

120°


Finish
WH - white
BK - black
GR - grey


White Black Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
86080350 - 16 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

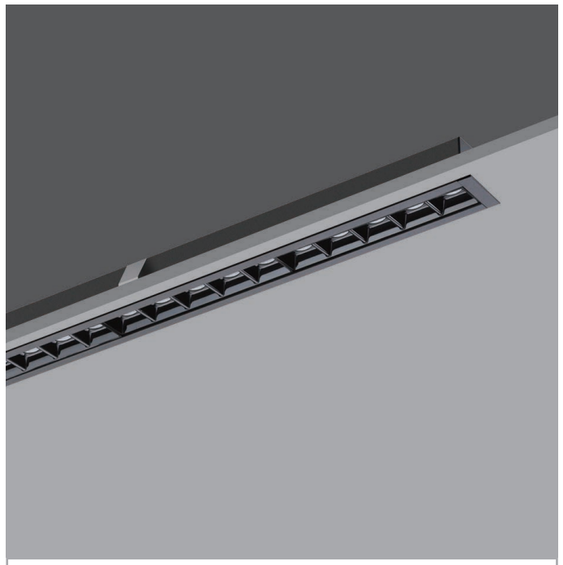



IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

81080000 18W 81080010 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm(18W) / 2400 lm(30W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Recessed mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish
WH - white
BK - black
GR - grey


White Black Grey


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81080000 - 18 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

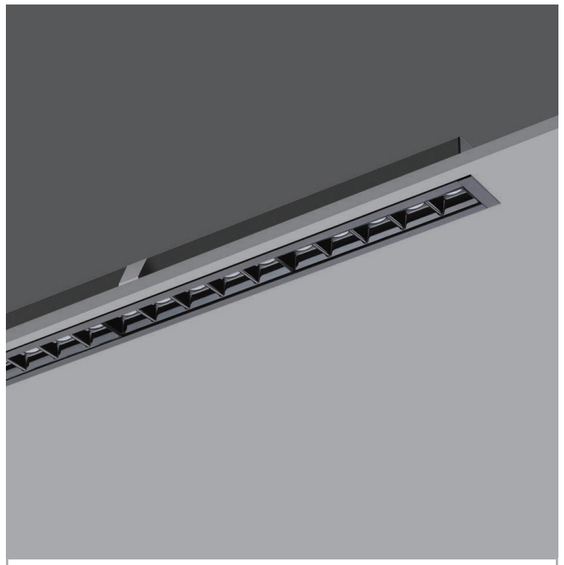



IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

81080030 24W 81080050 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1900 lm(24W) / 3200 lm(40W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with anti-glare reflector, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With high purity reflector can achieve a perfect lighting solution.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Recessed mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
15 - 15D
30 - 30D
45 - 45D

15° 30° 45°

Finish
WH - white
BK - black
GR - grey


White Black Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
81080030 - 24 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.





IP20 CE F 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

81080060 24W 81080070 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1560 lm(24W) / 2600 lm(40W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It is widely suitable for office and commercial spaces, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With opal PC diffuser.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Recessed mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
120 - 120D

120°

Finish
WH - white
BK - black
GR - grey

White | Black | Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:
81080060 - 24 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

PROFILE LED Office Lighting





IP20 CE F 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

86080500 18W 86080510 25W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 630 lm(18W) / 875 lm(25W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It is widely suitable for office and commercial spaces, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With opal PC diffuser.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
120 - 120D

120°

Finish
WH - white
BK - black
GR - grey


White | Black | Grey

Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
86080500 - 18 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.





IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

86080520 18W+6W
86080530 25W+8W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 840 lm(18W+6W) / 1155 lm(25W+8W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It is widely suitable for office and commercial spaces, which can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With opal PC diffuser.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
120 - 120D

120°

Finish
WH - white
BK - black
GR - grey

White Black Grey


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:
86080520 - 24 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.





IP20 3 SDCM

40,000hrs（Ta=25°C）
SMD LED

81080600 24W 81080610 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1400 lm(24W) / 2400 lm(40W)

PROFILE is a professional linear light, compact and elegant design, easy for installation. It deliver comfortable light with soft silicon rubber diffuser, which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Extrusion aluminium housing.
Anodised or powdercoated finish.
Excellent anti-glare control.
With soft silicon rubber diffuser.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
LED driver is connected externally.
Suspension or surface mounted.
Easy for installation and maintenance.

CRI
80 - Ra80
90 - Ra90

Ra80 Ra90

CCT
27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam
120 - 120D

120°

Finish
WH - white
BK - black
GR - grey

White Black Grey


Control type
D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:
81080600 - 24 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

* Lumen output is concerned with different CCT.

MOON Office Lighting

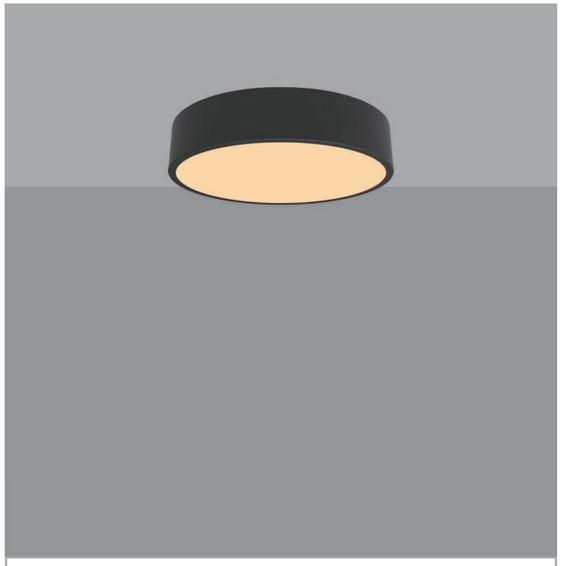



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83630010 18W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 1440 lm

MOON is a professional round surface mounted light, compact and elegant design, easy for installation , which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

120 - 120D

120°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83630010 - 18 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

MOON Office Lighting





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83640010 30W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 2400 lm

MOON is a professional round surface mounted light, compact and elegant design, easy for installation , which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

120 - 120D

120°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83630040 - 30 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

MOON Office Lighting





IP20

3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83650010 40W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 3200 lm

MOON is a professional round surface mounted light, compact and elegant design, easy for installation , which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

120 - 120D

120°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83650010 - 40 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

MOON Office Lighting

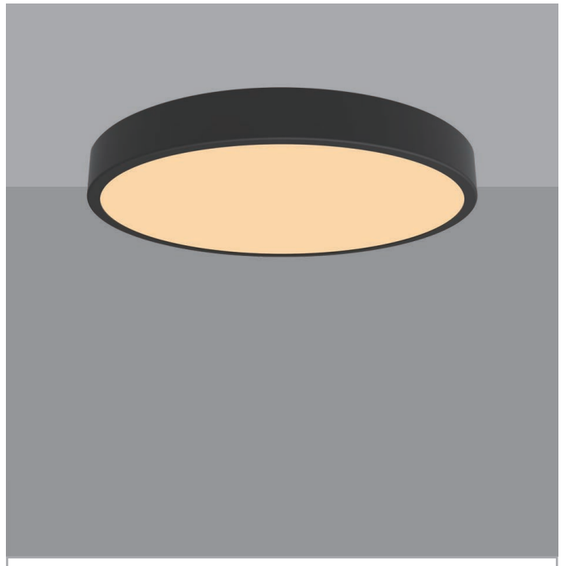



IP20

3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83660010 50W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 4000 lm

MOON is a professional round surface mounted light, compact and elegant design, easy for installation , which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

120 - 120D

120°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83660040 - 50 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

MOON Office Lighting

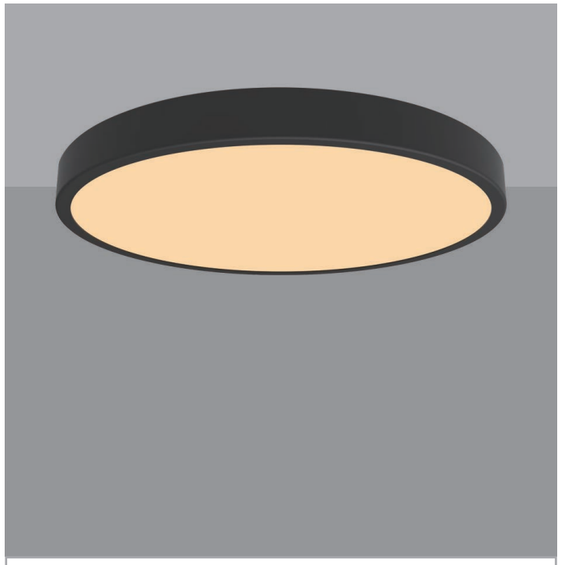



IP20  3 SDCM

40,000hrs（Ta=25° C）
SMD LED

MOON is a professional round surface mounted light, compact and elegant design, easy for installation , which is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Aluminium housing.
Powdercoated finish.
Excellent anti-glare control.
No UV or IR, can protect commodities properly, to avoid the color fading from radiation.
Built-in led driver.
Surface mounted.
Easy for installation and maintenance.

83680010 60W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 4800 lm

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

120 - 120D

120°

Finish

WH - white
BK - black
GR - grey

White | Black | Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

83680010 - 60 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.


* Lumen output is concerned with different CCT.




ARTIE LED

Gypsum Downlight

ARTIE LED Gypsum Downlight

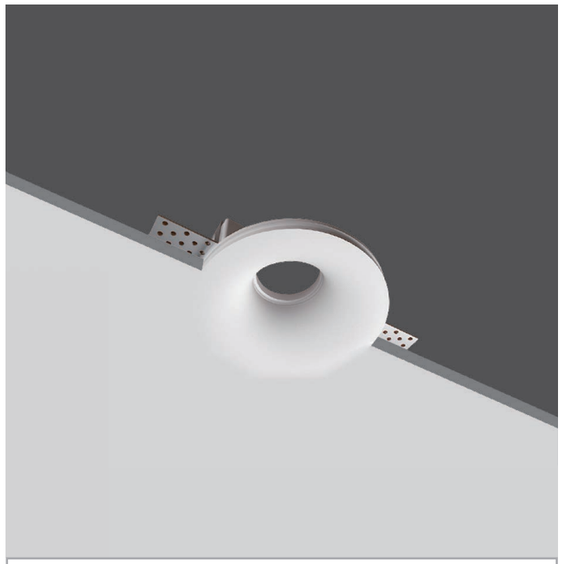





IP20 

50,000hrs（Ta=25° C）
COB LED

81000000 8W **81000010** 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 560 lm(8W) / 700 lm(10W)

ARTIE is an impressive downlight with gypsum housing, compact and elegant design. The housing is invisible after it is installed into the ceiling, which become a part of it, you will only see the light, that'll bring you an artist feeling. It is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Gypsum housing.
White finishing.
LED module is replaceable.
Remote led driver.
Recessed mounted.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

81000000 - 8 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

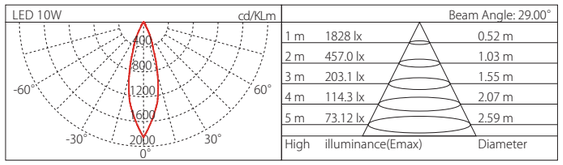


* IES files of different beam angle are available upon request.

* Lumen output is concerned with different CCT.

ARTIE LED Gypsum Downlight







IP20 

50,000hrs（Ta=25° C）
COB LED

81000020 8W **81000030** 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 560 lm(8W) / 700 lm(10W)

ARTIE is an impressive downlight with gypsum housing, compact and elegant design. The housing is invisible after it is installed into the ceiling, which become a part of it, you will only see the light, that'll bring you an artist feeling. It is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Gypsum housing.
White finishing.
LED module is replaceable.
Remote led driver.
Recessed mounted.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI




Ordering code sample:


81000020 - 8 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

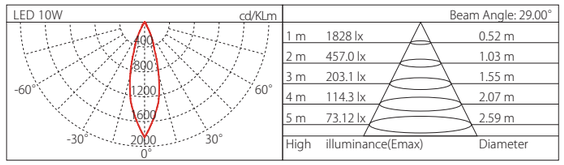

* IES files of different beam angle are available upon request.

ARTIE LED Gypsum Downlight

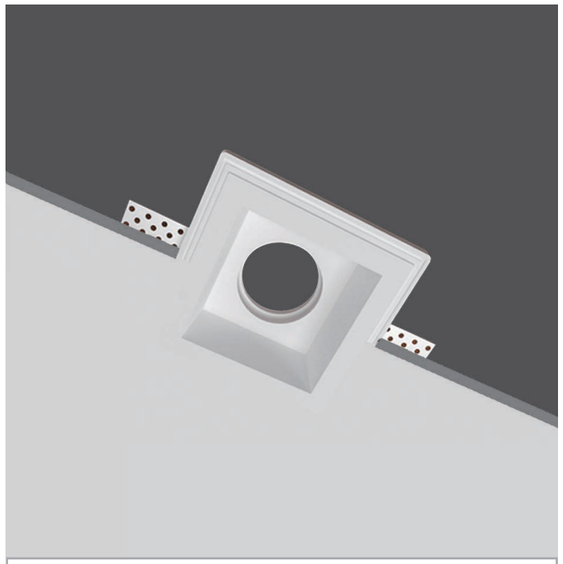





IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81000100 8W 81000110 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 560 lm(8W) / 700 lm(10W)

ARTIE is an impressive downlight with gypsum housing, compact and elegant design. The housing is invisible after it is installed into the ceiling, which become a part of it, you will only see the light, that'll bring you an artist feeling. It is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Gypsum housing.
White finishing.
LED module is replaceable.
Remote led driver.
Recessed mounted.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81000100 - 8 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

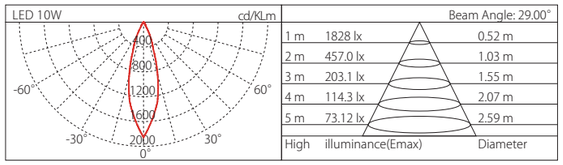

* IES files of different beam angle are available upon request.

ARTIE LED Gypsum Downlight







IP20 3 SDCM

50,000hrs（Ta=25° C）
COB LED

81000120 8W 81000130 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 560 lm(8W) / 700 lm(10W)

ARTIE is an impressive downlight with gypsum housing, compact and elegant design. The housing is invisible after it is installed into the ceiling, which become a part of it, you will only see the light, that'll bring you an artist feeling. It is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Gypsum housing.
White finishing.
LED module is replaceable.
Remote led driver.
Recessed mounted.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K



Beam

15 - 15D
24 - 24D
36 - 36D



Finish

WH - white




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:


81000120 - 8 - 90 - 27 - 15 - WH - D1
For complete code ordering information, please see page 232.

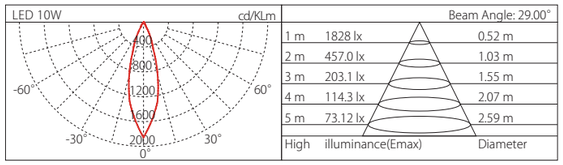

* IES files of different beam angle are available upon request.

ARTIE LED Gypsum Wall Luminaire





IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83060000 5W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 350 lm

ARTIE is an impressive wall light with gypsum housing, compact and elegant design. The housing is invisible after it is installed into the ceiling, which become a part of it, you will only see the light, that'll bring you an artist feeling. It is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Gypsum housing.
White finishing.
LED module is replaceable.
Built-in LED driver.
Surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

120 - 120D

120°

Finish

WH - white

White

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83060000 - 5 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

ARTIE LED Gypsum Wall Luminaire

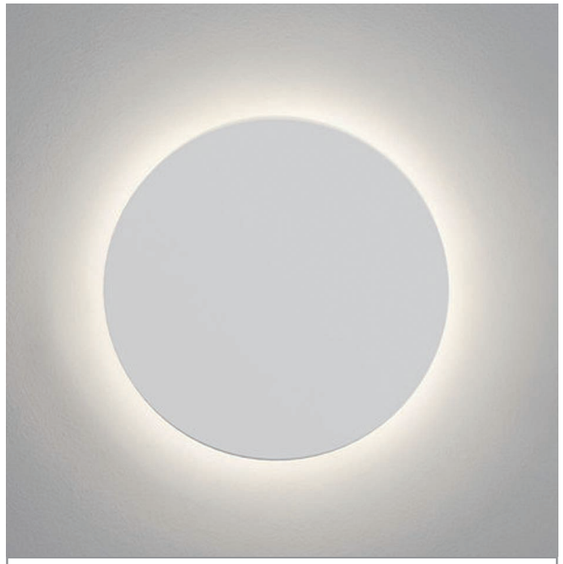



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83060010 10W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 700 lm

ARTIE is an impressive wall light with gypsum housing, compact and elegant design. The housing is invisible after it is installed into the ceiling, which become a part of it, you will only see the light, that'll bring you an artist feeling. It is widely suitable for office and commercial spaces. It can be used for office building, shopping mall, hotel, high-class club and exhibition & display area etc…

Gypsum housing.
White finishing.
LED module is replaceable.
Built-in LED driver.
Surface mounted.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

120 - 120D

120°

Finish

WH - white

White

Control type


D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI


Dimmable

Ordering code sample:

83060010 - 10 - 90 - 27 - 120 - WH - D1
For complete code ordering information, please see page 232.

CURVE LED Wall Recessed Step Light

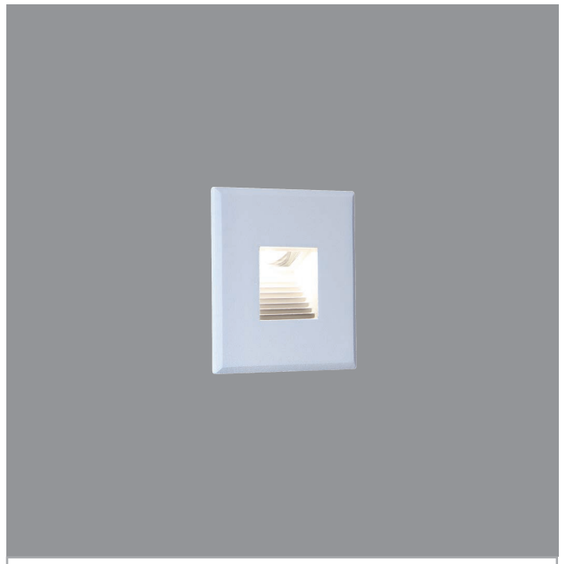



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83808510 1W 83808511 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 32 lm(1W) / 94 lm(3W)

CURVE LED Wall Recessed Step Light is elegant and compact design, with excellent anti-glare control, It is widely applicable for bars, star-rated hotels, entertainment area, home etc...

Die-casting aluminium housing and glass diffuser.
White,grey and black powdercoated finishing.
Driver is connected externally.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K



Beam

00 - wallwasher



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

83808510 - 3 - 80 - 27 - 00 - WH - D0
For complete code ordering information, please see page 232

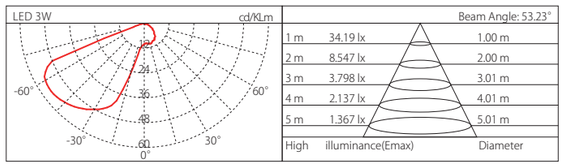

* IES files of different beam angle are available upon request.

Face cover

2068501
2068502
2068503





LED base

83807801 1W
83807803 3W



CURVE LED Wall Recessed Step Light

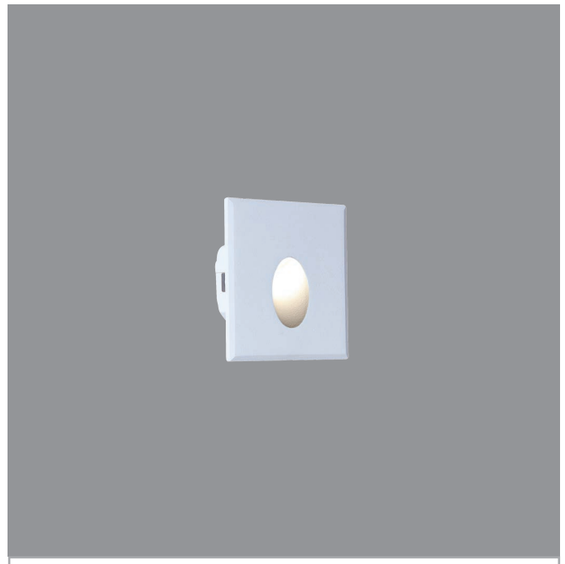



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83808520 1W 83808521 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 23 lm(1W) / 70 lm(3W)

CURVE LED Wall Recessed Step Light is elegant and compact design, with excellent anti-glare control, It is widely applicable for bars, star-rated hotels, entertainment area, home etc...

Die-casting aluminium housing and glass diffuser.
White,grey and black powdercoated finishing.
Driver is connected externally.
Easy for installation and maintenance.


CRI

80 - Ra80
90 - Ra90
95 - Ra95



CCT

27 - 2700K
30 - 3000K
40 - 4000K



Beam

00 - wallwasher



Finish

WH - white
BK - black
GR - grey




Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI



Ordering code sample:

83808520 - 1 - 80 - 27 - 00 - WH - D0
For complete code ordering information, please see page 232.

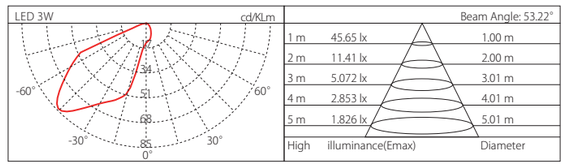

* IES files of different beam angle are available upon request.

Face cover

2068501
2068502
2068503





LED base

83807801 1W
83807803 3W



CURVE LED Wall Recessed Step Light

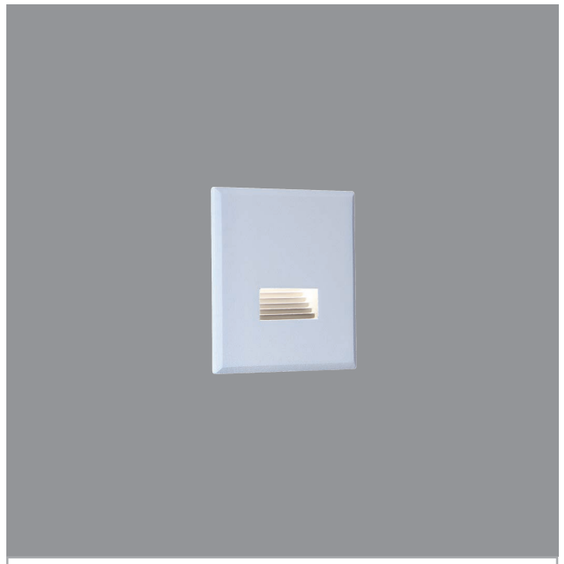



IP20 3 SDCM

40,000hrs（Ta=25° C）
SMD LED

83808530 1W **83808531** 3W

Input Voltage: AC 220V~240V 50Hz/60Hz
Lumens: 20 lm(1W) / 60 lm(3W)

CURVE LED Wall Recessed Step Light is elegant and compact design, with excellent anti-glare control, It is widely applicable for bars, star-rated hotels, entertainment area, home etc...

Die-casting aluminium housing and glass diffuser.
White,grey and black powdercoated finishing.
Driver is connected externally.
Easy for installation and maintenance.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K

Beam

00 - wallwasher

Wallwasher

Finish

WH - white
BK - black
GR - grey

White Black Grey


Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

Ordering code sample:

83808530 - 1 - 80 - 27 - 00 - WH - D0
For complete code ordering information, please see page 232.

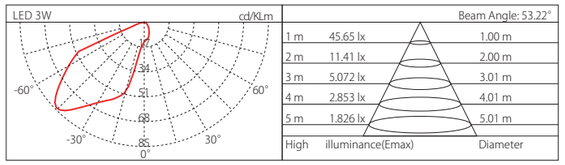

* IES files of different beam angle are available upon request.

Face cover

2068501
2068502
2068503

LED base

83807801 1W
83807803 3W

* Lumen output is concerned with different CCT.

Ordering code example

81012670 - 3 - 90 - 27 - 15 - WH - D1

- Control type
- Finishing
- Beam angle
- Color temperature
- CRI
- Wattage
- Code nr.

CRI

80 - Ra80
90 - Ra90
95 - Ra95

Ra80 Ra90 Ra95

CCT

27 - 2700K
30 - 3000K
40 - 4000K
50 - 5000K

Warm White 2700K | Warm White 3000K | Neutral White 4000K | Cool White 5000K

Beam

15 - 15D
30 - 30D

15° 30°

Finish

WH - white
BK - black
GR - grey

White Black Grey

Control type

D0 - ON/OFF
D1 - Phase triac
D2 - 1~10V
D3 - DALI

Dimmable

REGULATORY INFORMATION

The CE mark indicates that the product complies with the Europe an directives of electrical equipment of certain voltage limits.

The CCC mark indicates that the product complies with the requi rements of implementation rules for China compulsory certification.

Class I – Equipment in which the protection against electric sh ock depends not only on the main insola tion. All active parts are connected to a protective earth circuit.

Class II – Equipment in which the protection against electric shock depends not only on the main insola tion. Includes double or reinforced isolation.

Class III – Equipment in which the protection against electric shock depends on the power supply from a safety low voltage.


This luminaire can both rotate and tilt adjustable.

Tilt adjustable.

Suitable for indoor use.

Suitable for outdoor use.

LUMINAIRE'S APPLICATION TYPE



Cut size and shape for recessing luminaire.

OPERATING VOLTAGE

12V 12V – luminaire voltage supply.

24V 24V – luminaire voltage supply.

220V~240V 50Hz / 60Hz 220-240V 50Hz/60Hz – luminaire supply voltage and operating frequency.

PROTECTION DEGREE

IP20 Protection against solid objects with a diameter exceeding 12mm. No protection against liquids.

IP40 Protection against solid objects with a diameter exceeding 1mm. No protection against liquids.

IP43 Protection against solid objects with a diameter exceeding 1mm. Protected against falling drops of water with a maximum angle of 60° .

IP44 Protection against solid objects with a diameter exceeding 1mm. Protected against water projection.

IP54 Protection against solid objects with a diameter inferior than 1mm. Protected against water projection.

IP55 Protection against solid objects with a diameter inferior than 1mm. Protected against water jets.

IP65 Full sealed to dust. Protected against water jets.

IP66 Full sealed to dust. Protected against strong water jets (strength of ocean waves).

IP67 Full sealed to dust. Protected against the effects of immersion (1m max).

DEGREE OF MECHANICAL PROTECTION

IK05 Protection against a 200 g solid object released from a height of 35cm. Shock energy 0,700 (J).

IK07 Protection against 500 g solid object released from a height of 40cm. Shock energy 2 (J).

IK08 Protection against a 1,7kg solid object released from a height of 29,5cm. Shock energy 5 (J).

IK10 Protection against a 5kg solid object released from a height of 40cm. Shock energy 20 (J).

Ref.No	Page
81000000	223
81000010	223
81000020	224
81000030	224
81000100	225
81000110	225
81000120	226
81000130	226
81001071	124
81001072	124
81001073	125
81001074	125
81001081	129
81001082	129
81001083	130
81001084	130
81001091	30
81001092	31
81001093	32
81001094	33
81001095	35
81001096	36
81001097	39
81001098	40
81001111	25
81001112	26
81001113	27
81001114	28
81002011	3
81002012	4
81012080	54
81012090	55
81012108	161
81012130	68
81012140	45
81012150	71
81012200	171
81012210	145
81012240	173
81012250	172
81012260	174
81012268	167
81012298	150
81012358	152
81012528	17
81012538	18
81012610	95
81012660	42
81012670	6
81012680	11
81012718	90
81012738	140
81012758	43
81012778	142
81012780	9
81012787	59
81012797	13
81012800	155
81012807	14
81012810	169
81012817	7
81012820	143
81012827	12
81012830	170
81012840	144
81012850	165
81012860	156
81012870	45
81012928	49
81012938	168
81013338	163
81014008	160
81018268	23
81018278	19
81018838	191
81018870	191
81018948	189
81018958	189
81021038	75
81021038.05	112
81021068	75
81021078	94
81032058	85
81032068	100
81032080	62
81032088	85
81032090	70
81032098	99
81032100	72
81032108	155
81032110	50
81032118	85
81032128	50
81032138	99
81032160	97
81032170	65
81032180	66
81032288	54
81032318	59
81032328	62
81032350.2	16
81032380	44
81032381	44
81032390	152
81032408	163
81032418	100
81032518	60
81032528	72
81032538	71
81032540	55
81032548	115
81032560	128
81032568	101
81032580	126
81032668	61
81032708	61
81032878	60
81032878	150
81032880	76
81032890	78
81032900	51
81032900	67
81032968	53
81032968	69
81032978	68
81032980	160
81033010	85
81033020	100
81033030	101
81033208	85
81033218	97
81033328	155
81033340	163
81033348	65
81033358	66
81052688	114
81052768	65
81052778	66
81052828	46
81052928	132
81052968	20
81052998	22
81053008	80
81053038	69
81053058	80
81053068	58
81053098	84
81053258	84
81053288	15
81053298	48
81053308	49
81053318	51
81053328	53
81053438	133
81053558	135
81053568	70
81053708	136
81053818	137
81053878	161
81053938	138
81053948	154
81054048	139
81054308	113
81054318	94
81054328	95
81054408	79
81054418	91
81054428	67
81054438	79
81054448	57
81054508	88
81054548	88
81054558	116
81054608	83
81054618	92
81054638	83
81054808	83
81054818	57
81054838	83
81054848	92
81054858	57
81054868	84
81054878	58
81054898	84
81054908	58
81054928	88
81054938	146
81054968	88
81055418	146
81080000	211
81080010	211
81080030	212
81080050	212
81080060	213
81080070	213
81080600	216
81080610	216
82000018	193
82000058	195
82000068	195
82018800	197
82018820	199
82018828	200
82018838	194
82018860	200
82018868	200
82018870	194
82018890	197
82018908	200
82018958	193
83060000	227
83060010	228
83603710	117
83610070	176
83610080	177
83610090	179
83610100	180
83610110	181
83610120	181
83610130	182
83610150	182
83610160	182
83610170	183
83610180	183
83610190	183
83610200	184
83610210	184
83610220	184
83630010	217
83630711	118
83630712	119
83640010	218
83640710	120
83640711	121
83640712	122
83650010	219
83660010	220
83680010	221
83808510	229
83808511	229
83808520	230
83808521	230
83808530	231
83808531	231
86080000	203
86080010	203
86080020	203
86080100	204
86080110	204
86080120	204
86080200	205
86080210	205
86080220	205
86080230	206
86080250	206
86080260	206
86080270	207
86080280	207
86080300	208
86080310	208
86080320	209
86080330	209
86080350	210
86080360	210
86080500	214
86080510	214
86080520	215
86080530	215
81012800.T	158
81014008.T	162
81032108.D	156
81032108.T	158
81032408.T	166
81032878.T	154
81032898.15T	107
81032898.1T	103
81032898.3T	104
81032898.5T	105
81032898.9T	106
81032988.T	162
81033328.D	156
81033328.T	158
81033338.D	165
81033338.T	166
81033340.D	165
81033340.T	166
81052898.10T	111
81052898.1T	108
81052898.3T	109
81052898.5T	110
81054938.D	147
81054938.T	148
81055418.D	147
81055418.T	148